

MD310 AC Drive

Open Loop General Purpose & Economic

Features & Functions

- Open loop V/F & SVC control
- Starting torque
 - 150% at 0.5Hz (SVC)
 - 100% at 1.0Hz (V/F)
- Modbus or CANlink*1 comms
- Automatic torque boost
- Slip compensation
- Simplified parameter for easy set up
- 4-Independent S-Ramps
- Flexible programmable I/O connection
- Variable DC-injection braking
- Comprehensive trip diagnostics
- Output frequency 500Hz
- In-Built Dynamic braking unit

Wide operating voltage
 Three Phase 380Vac
 323 to 480Vac
 0.4kW to 18.5kW



Onboard Modbus RTU
 Optional CANlink*1


Operation in high
 ambient temperature
 45°Cava



Notes

*1 CANlink is Inovance proprietary serial comms.

Swing Frequency

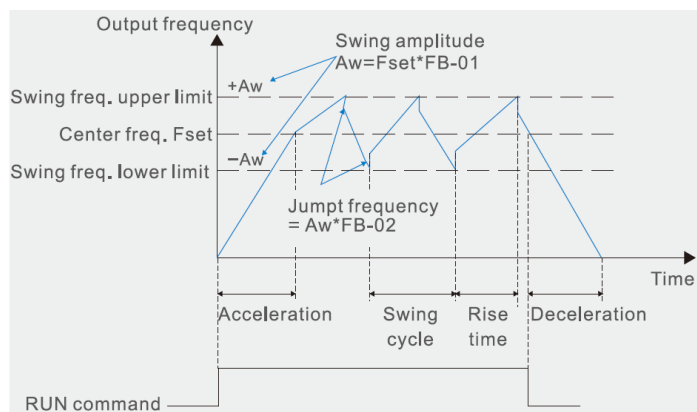

Switchover among multiple motors



Control multiple motors
 simultaneously in V/F mode.


Control up to 2 motors in different
 time divisions in SVC mode
 (Multiple motor parameter groups)

General Specifications

Voltage class			Three Phase 380Vac									
Drive model: MD310TxxxB-INT			0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5
Dimension		Frame	Size 1				Size 2		Size 3		Size 4	
		Height Width Depth	[H]: 128 mm [W]: 108 mm [D]: 158 mm				[H1]: 209 mm [W]: 130 mm [D]: 164 mm		[H1]: 260 mm [W]: 140 mm [D]: 171 mm		[H1]: 298 mm [W]: 180 mm [D]: 176 mm	
Drive Input	Rated input voltage		Three Phase 380 to 480V, -15% to +10% (323Vac to 528Vac)									
	Rated input current, [A]		1.9	3.4	5	5.8	10.5	14.6	20.5	26	35	38.5
	Power capacity, [kVA]		1	1.5	3	4	5.9	8.9	11	17	21	24
	Rated input frequency		50/60 Hz, ±5% (47.5 to 63Hz)									
Drive Output	Applicable motor	[kW]	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5
	Output current ,[A]*		1.5	2.1	3.8	5.1	9	13	17	25	32	37
	Overload capacity		150% for 60 Sec & 180% for 2 Sec									
	Max. output voltage		380Vac to 440Vac (Proportional to input voltage)									
	Max. output frequency		500 Hz									
Braking Resistor	Recommended power, [W]		150W	150W	150W	250W	300W	400W	500W	800W	1000W	1300W
	Recommended resistance, [Ω]		≥300Ω	≥300Ω	≥220Ω	≥200Ω	≥130Ω	≥90Ω	≥65Ω	≥43Ω	≥32Ω	≥25Ω
Enclosure			IP 20									


* Carrier switching frequency 6 kHz at rated output current.

General Connection Diagram

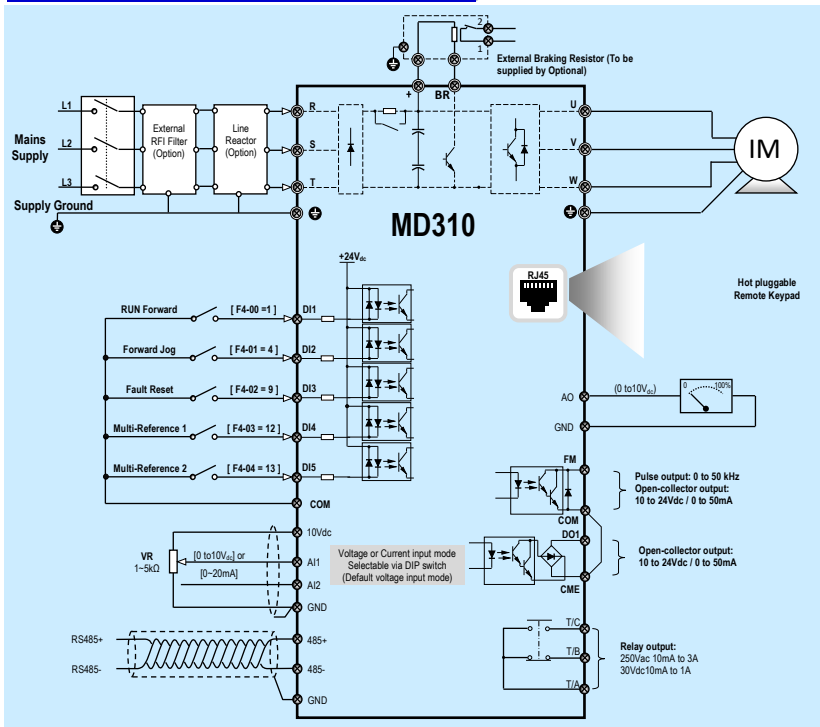


Dimensions

Dimensions of
0.4kW to 2.2kW



Dimensions of
3.7kW to 18.5kW

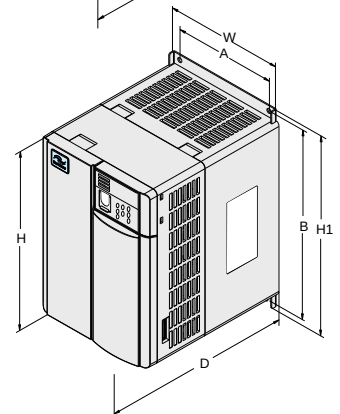

For more information, please contact our local offices.

	Hong Kong SAR Inova Automation Co., Limited International Export Office Tel : (852) 2751 6080 Fax : (852) 2751 6933 info@inova-automation.com www.inova-automation.com	Italy - Milan Inova Automation Italy Srl Tel : (39) 02 2682 2318 info@inova-automation.com	India: Inova Automation Pvt. Ltd. Head Office Chennai Tel : (91) 44 4380 0201 Ahmedabad Tel : (91) 79 4003 4274 Mumbai Tel : (91) 90 0496 0595 New Delhi Tel : (91) 99 9092 8961 info.inovaindia@inova-automation.com	Turkey - Istanbul Inova Automation Türkiye Tel : (90) 216 706 1789 info.turkey@inova-automation.com
--	--	---	--	--



CÔNG TY TNHH THƯƠNG MẠI KỸ THUẬT ĐIỆN CITY

Nhà phân phối thiết bị điện công nghiệp hàng đầu Việt Nam

TUOH

KAKU[®]

INOVANCE

IDEC

Think Automation and beyond...

FE Fuji Electric
Innovating Energy Technology

**MITSUBISHI
ELECTRIC**
Changes for the Better

T TAIWAN METERS



LIÊN HỆ VỚI CHÚNG TÔI

Địa chỉ: 125 Phú Châu, KP1, P. Tam Bình,
TP. Thủ Đức, TP. HCM

Hotline: 0909 808 905 (Zalo)

Email: minh.diencity@gmail.com

Website: diencity.com