

# COMBINATION SURGE ARRESTER FILTER - Model CSAF332A-NE

## TECHNICAL DATA SHEET

CSAF MC 50-B 3+1 + V20-C 3-280 + LC63

PROTECTION SET, LIGHTNING, SURGE ARRESTOR FILTER COMBINATION, TYPE 1+2



Protection set, lightning, surge arrester filter combination, type 1+2

Protection set, pre-installed in IP65 housing for use in TN-S and TT networks

For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)

Lightning current arresting capacity to 50 kA (10/350) per pole and up to 125 kA (10/350) N-PE


Application: Mobile telecommunications systems and industrial systems with special requirements.

### Dimensions

H x W x D  
550 x 400 x 180

Type	Highest continuous voltage V	Version	Pack Pcs	Weight kg/100 pcs.	Item No.
CSAF332A-NE	255	3+NPE	1		

### Connection

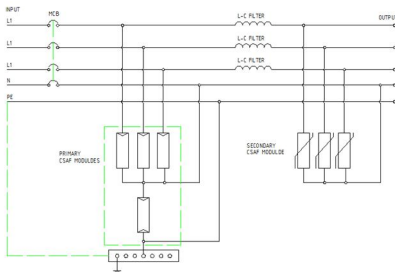

### CSAF332A-NE

Nominal voltage V	$U_n$	230
Highest continuous voltage V		255
Rated current (A)	$I_L$	32
Power distribution systems		TN-S, TT
SPD to EN 61643-11		Type 1+2
SPD to IEC 61643-11		Class I+II
Lightning protection zone LPZ		0→2
Primary surge protection rating per phase		50kA 10/350µs & 50kA 8/20µs
Secondary surge protection rating per phase		40kA 8/20µs
N – E protection		125kA 10/350µs & 125kA 8/20µs
Protection Modes:		L-N, N-PE
Inductor:		Non-saturating, low pass, power and noise filtering
Voltage protection level kV	$U_p$	<2
Response time ns	$t_A$	<25
Follow current quenching capacity (eff) [N-PE] kA		25
Maximum back-up fuse A		32
Temperature range °C	$\vartheta$	-40 - 85
Protection status indication		Status Indicator
Environmental rating:		0 – 95% humidity
Protection rating		IP55
Enclosure		Metal enclosure
Colour		White
Mounting		Wall mount
Warranty		3 years manufacturer's warranty
Connection cross-section rigid mm <sup>2</sup>		10-50
Connection cross-section, multi-wire mm <sup>2</sup>		10-35
Connection cross-section, flexible mm <sup>2</sup>		10-25