

## Specification Chart

Output	Number of phases	Number of poles	Frequency Hz	Voltage V 50/60/60Hz	Rated current A 50/60/60Hz	Rated revolution r/min 50/60/60Hz	Protection	Cooling method	Rating	Insulation	Brake		
											Type	Rated torque of motor torque	Insulation
0.4kW	Three-phase	4	50/60/60	200/200/220 (400/400/440)	2.3/2.0/2.0 (1.2/1.0/1.0)	1380/1650/1680 (1390/1670/1700)	Totally enclosed (IP44)	Self managed (JC411)	Continuous	Class E	Non-excitation	At least 150%	Class B

Note 1: The values in parentheses under "Rated current" and "Rated revolution" are for 400 V class.


Note 2: The protective construction for the brake type is IP20.

Model number	Motor output kW	Actual reduction ratio	Number of reduction steps	Reducer frame number	Output shaft revolution r/min		Allowable output shaft torque				Allowable output shaft O.H.L.		Drawing number of outline dimensions	
					50Hz	60Hz	N·m		N·m		N	{kgf}		
							{kgf·m}	{kgf·m}	50Hz	60Hz				
CSMA040	10	0.4	1/10	1	16	150	180	22.3	{ 2.3 }	18.7	{ 1.9 }	1920	{ 196 }	1
	15		100			120	31.4	{ 3.2 }	26.7	{ 2.7 }	1920	{ 196 }		
	20		75			90	40.5	{ 4.1 }	34.3	{ 3.5 }	2310	{ 236 }		
	25		60			72	46.1	{ 4.7 }	41.2	{ 4.2 }	2310	{ 236 }		
	30		1/30		22	50	60	54.3	{ 5.5 }	46.4	{ 4.7 }	2650	{ 270 }	2
	40		1/40			37.5	45	72.1	{ 7.4 }	61.5	{ 6.3 }	3970	{ 405 }	
	50		1/50			30	36	85.3	{ 8.7 }	73.1	{ 7.5 }	3970	{ 405 }	
	60		1/60			25	30	97.5	{ 9.9 }	83.7	{ 8.5 }	3970	{ 405 }	
HCMA040	40	0.4	1/40	2	22	37.5	45	82.0	{ 8.4 }	69.0	{ 7.1 }	3970	{ 405 }	3
	50		30			36	102	{ 10.4 }	86.0	{ 8.7 }	3970	{ 405 }		
	60		25			30	116	{ 11.8 }	98.0	{ 10.0 }	3970	{ 405 }		
	75		1/75		28	20	24	138	{ 14.0 }	121	{ 12.3 }	3970	{ 405 }	4
	90		1/90			16.7	20	167	{ 17.0 }	141	{ 14.4 }	5320	{ 543 }	
	100		1/100			15	18	184	{ 18.8 }	155	{ 15.9 }	5320	{ 543 }	
	120		1/120	32	12.5	15	197	{ 20.1 }	167	{ 17.1 }	5320	{ 543 }	5	
	150		1/150		10	12	240	{ 24.5 }	204	{ 20.8 }	5320	{ 543 }		
	180		1/180		8.3	10	270	{ 27.5 }	230	{ 23.4 }	5320	{ 543 }		
	200		1/200	32	7.5	9	280	{ 28.6 }	252	{ 25.7 }	5320	{ 543 }	5	
	240		1/240		6.3	7.5	337	{ 34.4 }	288	{ 29.4 }	9460	{ 965 }		
	300		1/300		5	6	362	{ 37.0 }	349	{ 35.6 }	9460	{ 965 }		

Note 1: The actual reduction ratio is shown as the reduction ratio.

Note 2: The output shaft revolution rate is calculated by dividing the synchronous motor revolution rate by the reduction ratio. Calculate the actual output revolution rate from the motor's rated revolution rate.

## Output Housing Dimensions

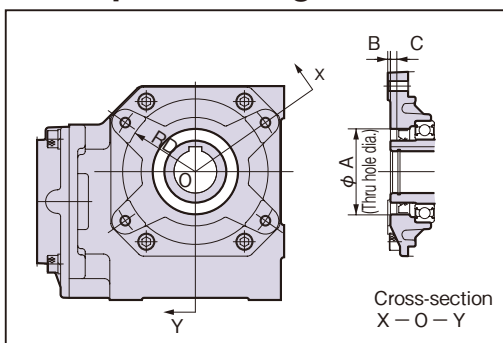

Frame number	Thru hole $\phi A$ (H8)	B	C	RD
13	45	1.5	3	34
16	58	1.5	3	40.5
22	70	2.0	4	54
32	92	5.0	5	66