

Technical data sheet

Surge protection, arrestor, type 1+2 (office and housing)



Lightning current and surge arrestor, 3-pole + NPE




Combination arrestor set, lightning and surge arrestor Type 1+2 to DIN EN 61643-11 (B+C to VDE 0675 part 6).



- For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity 12.5 kA (10/350) per pole and 50 kA (10/350) in total
- Universally suitable for TN and TT systems
- With new Multibase base with multi-connection terminals
- Complete unit, consisting of cover and base, pre-mounted and ready for connection
- arrestor, connectable with dynamic cut-off unit
- With visual function display
- Voltage protection level < 1,3 kV
- Encapsulated, non-extinguishing zinc oxide varistor arrestor for use in distributor housings
- Labelled connections


Dimensions

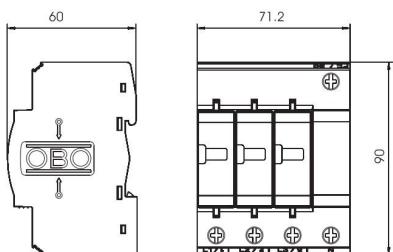

Application: Equipotential bonding in buildings, even those with external lightning protection of class III and IV, and in standard distributor housings.

Type	Highest continuous voltage V	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
V50-B+C 3+NPE 280	3+NPE		1	55,000	5093654

Connection options

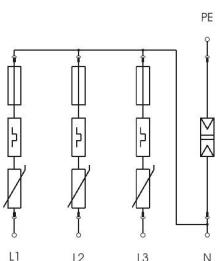

V50-B+C 3+NPE

Nominal voltage V	U_N	230
SPD to EN 61643-11		Type 1+2
SPD to IEC 61643-11		Class I+II
Lightning protection zone LPZ		0→2
Impulse discharge current (10/350) kA	I_{imp}	12,5
Total discharge current (10/350) kA	I_{total}	50
Nominal discharge current (8/20) kA	I_n	30
Arrestor surge current (8/20) [total] kA	$I_{total\ 8/20}$	50
Maximum discharge current (8/20 μ s) kA	I_{max}	50
		—
Voltage protection level kV	U_p	< 1,3
Response time ns	t_A	< 25
Maximum back-up fuse A		125
Temperature range °C	ϑ	-40-80
Division unit TE (17.5 mm)		4
Protection rating		IP20
Connection cross-section rigid mm ²		2,5-35
Connection cross-section, multi-wire mm ²		2,5-35
Connection cross-section, flexible mm ²		2,5-25