

DIN V- 2C

Signal Line SPDs
Measurement and Control



General Data

No. DIN rail modules	1
Format	DIN
Product standards	IEC 61643-21



PART NUMBERS					
XX	6	12	24	48	150
DIN XXV-2C	77840905	77840910	77840915	77840920	77840925

SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES					
DIN XXV-2C	6	12	24	48	150
Maximum continuous operating voltage (AC) - Uc (L-PE) [V]	7	16	27	56	180
Nominal voltage AC 50-60Hz - Un (L1/L2-PE) [V]	6	12	24	48	150
Nominal discharge current (8/20)- In [kA]	0.1				
Nominal discharge current (8/20) - In (L-PE) [kA]	5				
Max Discharge Current (8/20) - Imax (L-PE) [kA]	10				
Voltage protection level at In - Up (L1/L2-PE) [V]	≤10	≤20	≤40	≤70	≤200

TECHNICAL FEATURES					
DIN XXV-2C	6	12	24	48	150
No. protected pairs	1				
Bandwidth [MHz]	1	1.2	4	5	
Max. communication voltage [V]	6	12	24	48	110

MECHANICAL AND ENVIRONMENTAL FEATURES					
DIN XXV-2C	6	12	24	48	150
Temperature range [°C]	-20 ... 60				
Housing color	Grey RAL 7035				
Input connector	Terminal				
Output connector	Terminal				
Stranded conductor cross section	2,5 mm²				
Torque rating [N m]	0.5				

DATASHEET

This document is subject to change at any time without notice www.cirprotec.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved


Phân phối bởi/Distributed by:
www.chongsetdongnam.com



DIN V- 2C


Signal Line SPDs
Measurement and Control

DIMENSIONS AND WEIGHT



DIN XXV-2C	6	12	24	48	150
Net Weight [kg]	0.049				
Gross weight [kg]	0.068				
Packaging dimensions (H x W x L) [mm]	117 × 24 × 90				

INTERNAL CONFIGURATION

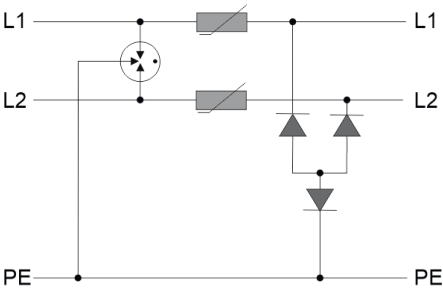

DATASHEET

This document is subject to change at any time without notice www.cirprotec.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved

Phân phối bởi/Distributed by:
www.chongsetdongnam.com