

10K CAST STAINLESS STEEL, BALL VALVES

KITZ Fig:10UTB

Sizes: 1/2-8inch(15-200mm)

Anti-static Device, Full Bore, Flanged Ends,

Full Bore,

Bolted Body Cap,

Standards

- End to End: KITZ STANDARD
- End Connection: JIS B2220 10K
- Wall Thickness: ASME B16.34 CLASS 150

Test Standard

- KITZ STANDARD

Dimensions

SIZE(Inch/mm)	L	H	D1	Kg
1/2 15	110,0	102,0	130,0	2,2
3/4 20	120,0	105,0	130,0	2,6
1 25	130,0	124,0	160,0	4,4
1 1/4 32	140,0	128,0	160,0	5,8
1 1/2 40	165,0	115,0	230,0	7,1
2 50	180,0	120,0	230,0	9,0
2 1/2 65	190,0	155,0	400,0	16,0
3 80	200,0	165,0	400,0	19,0
4 100	230,0	200,0	460,0	29,0
5 125	300,0	220,0	460,0	48,0
6 150	340,0	295,0	1000,0	70,0
8 200	450,0	355,0	1500,0	105,0

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	SCS13A
BODYCAP	STAINLESS STEEL	SCS13A
STEM	STAINLESS STEEL	SUS304
BALL	STAINLESS STEEL	SUS304 OR SCS13A

Specifications

10K CAST STAINLESS STEEL, BALL VALVES, Anti-static Device, Full Bore, Flanged Ends,

Full Bore,


Bolted Body Cap,

End Connection: JIS B2220 10K, Wall Thickness: ASME B16.34 CLASS 150, Sizes: 1/2-8

inch(15-200mm), BODY MATERIAL: STAINLESS STEEL, BODYCAP

MATERIAL: STAINLESS STEEL, STEM MATERIAL: STAINLESS STEEL, BALL

MATERIAL: STAINLESS STEEL, KITZ Fig:10UTB

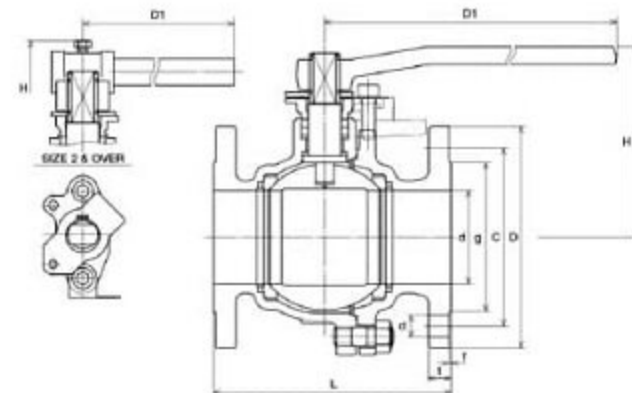

For more details, please refer to the drawing.

Pressure Loss Table (Fluid : Water)

