# NBR Rubber Sheet

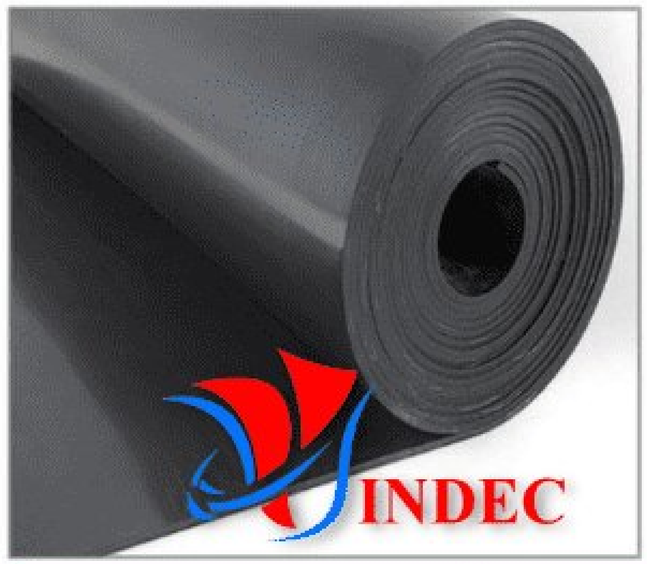


Nitrile rubber known as NBR, Buna-N, proving excellent resistance to petroleum oils as well as mineral and vegetable oils. NBR rubber sheet widely use in automotive and aeronautical industry to make fuel and oil seals, self-sealing feul tanks lining.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m, 20m

| | Hardness Shore A | Density g/cm3 | Tensile Strength Mpa | Elongation % | Temperature Range °C |
|---|---|---|---|---|---|
| NBR rubber sheet | 80 +/-5 | 1.5 | 4 | 200% | -20 ~ 100 |
| NBR rubber sheet | 65 +/-5 | 1.5 | 3 | 250% | -20 ~ 90 |
| NBR rubber sheet | 65 +/-5 | 1.5 | 4 | 250% | -20 ~ 90 |
| NBR rubber sheet | 65 +/-5 | 1.4 | 5 | 250% | -20 ~ 90 |
| NBR rubber sheet | 65 +/-5 | 1.4 | 6 | 300% | -20 ~ 100 |
| NBR rubber sheet | 65 +/-5 | 1.4 | 8 | 300% | -20 ~ 100 |
| NBR rubber sheet | 60 +/-5 | 1.4 | 10 | 300% | -20 ~ 110 |
| NBR rubber sheet | 50 +/-5 | 1.35 | 10 | 300% | -20 ~ 110 |

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.