

Technical Data Sheet



FEROLITE NAM 37 Steel NON ASBESTOS GASKET JOINTING SHEET



Applications:

Suitable for oil resistant gasket material for light to medium loading. Suitable for low operating pressure, e.g. transformers, compressors and also used for easily deformable components with low surface pressure like valve covers and oil pans in internal combustion engines.

General data:

Material Composition
(Type of fibres)

Aramid Fiber . Mineral Fiber with metal gauge centre

Binders

NBR

OPERATING CONDITION

Max.Peak Temp

300°C

Max. Continuous Temp


220°C

Max.Continuous Temp.with steam

160°C

Max. Operating Pressure

100 Kg/cm²

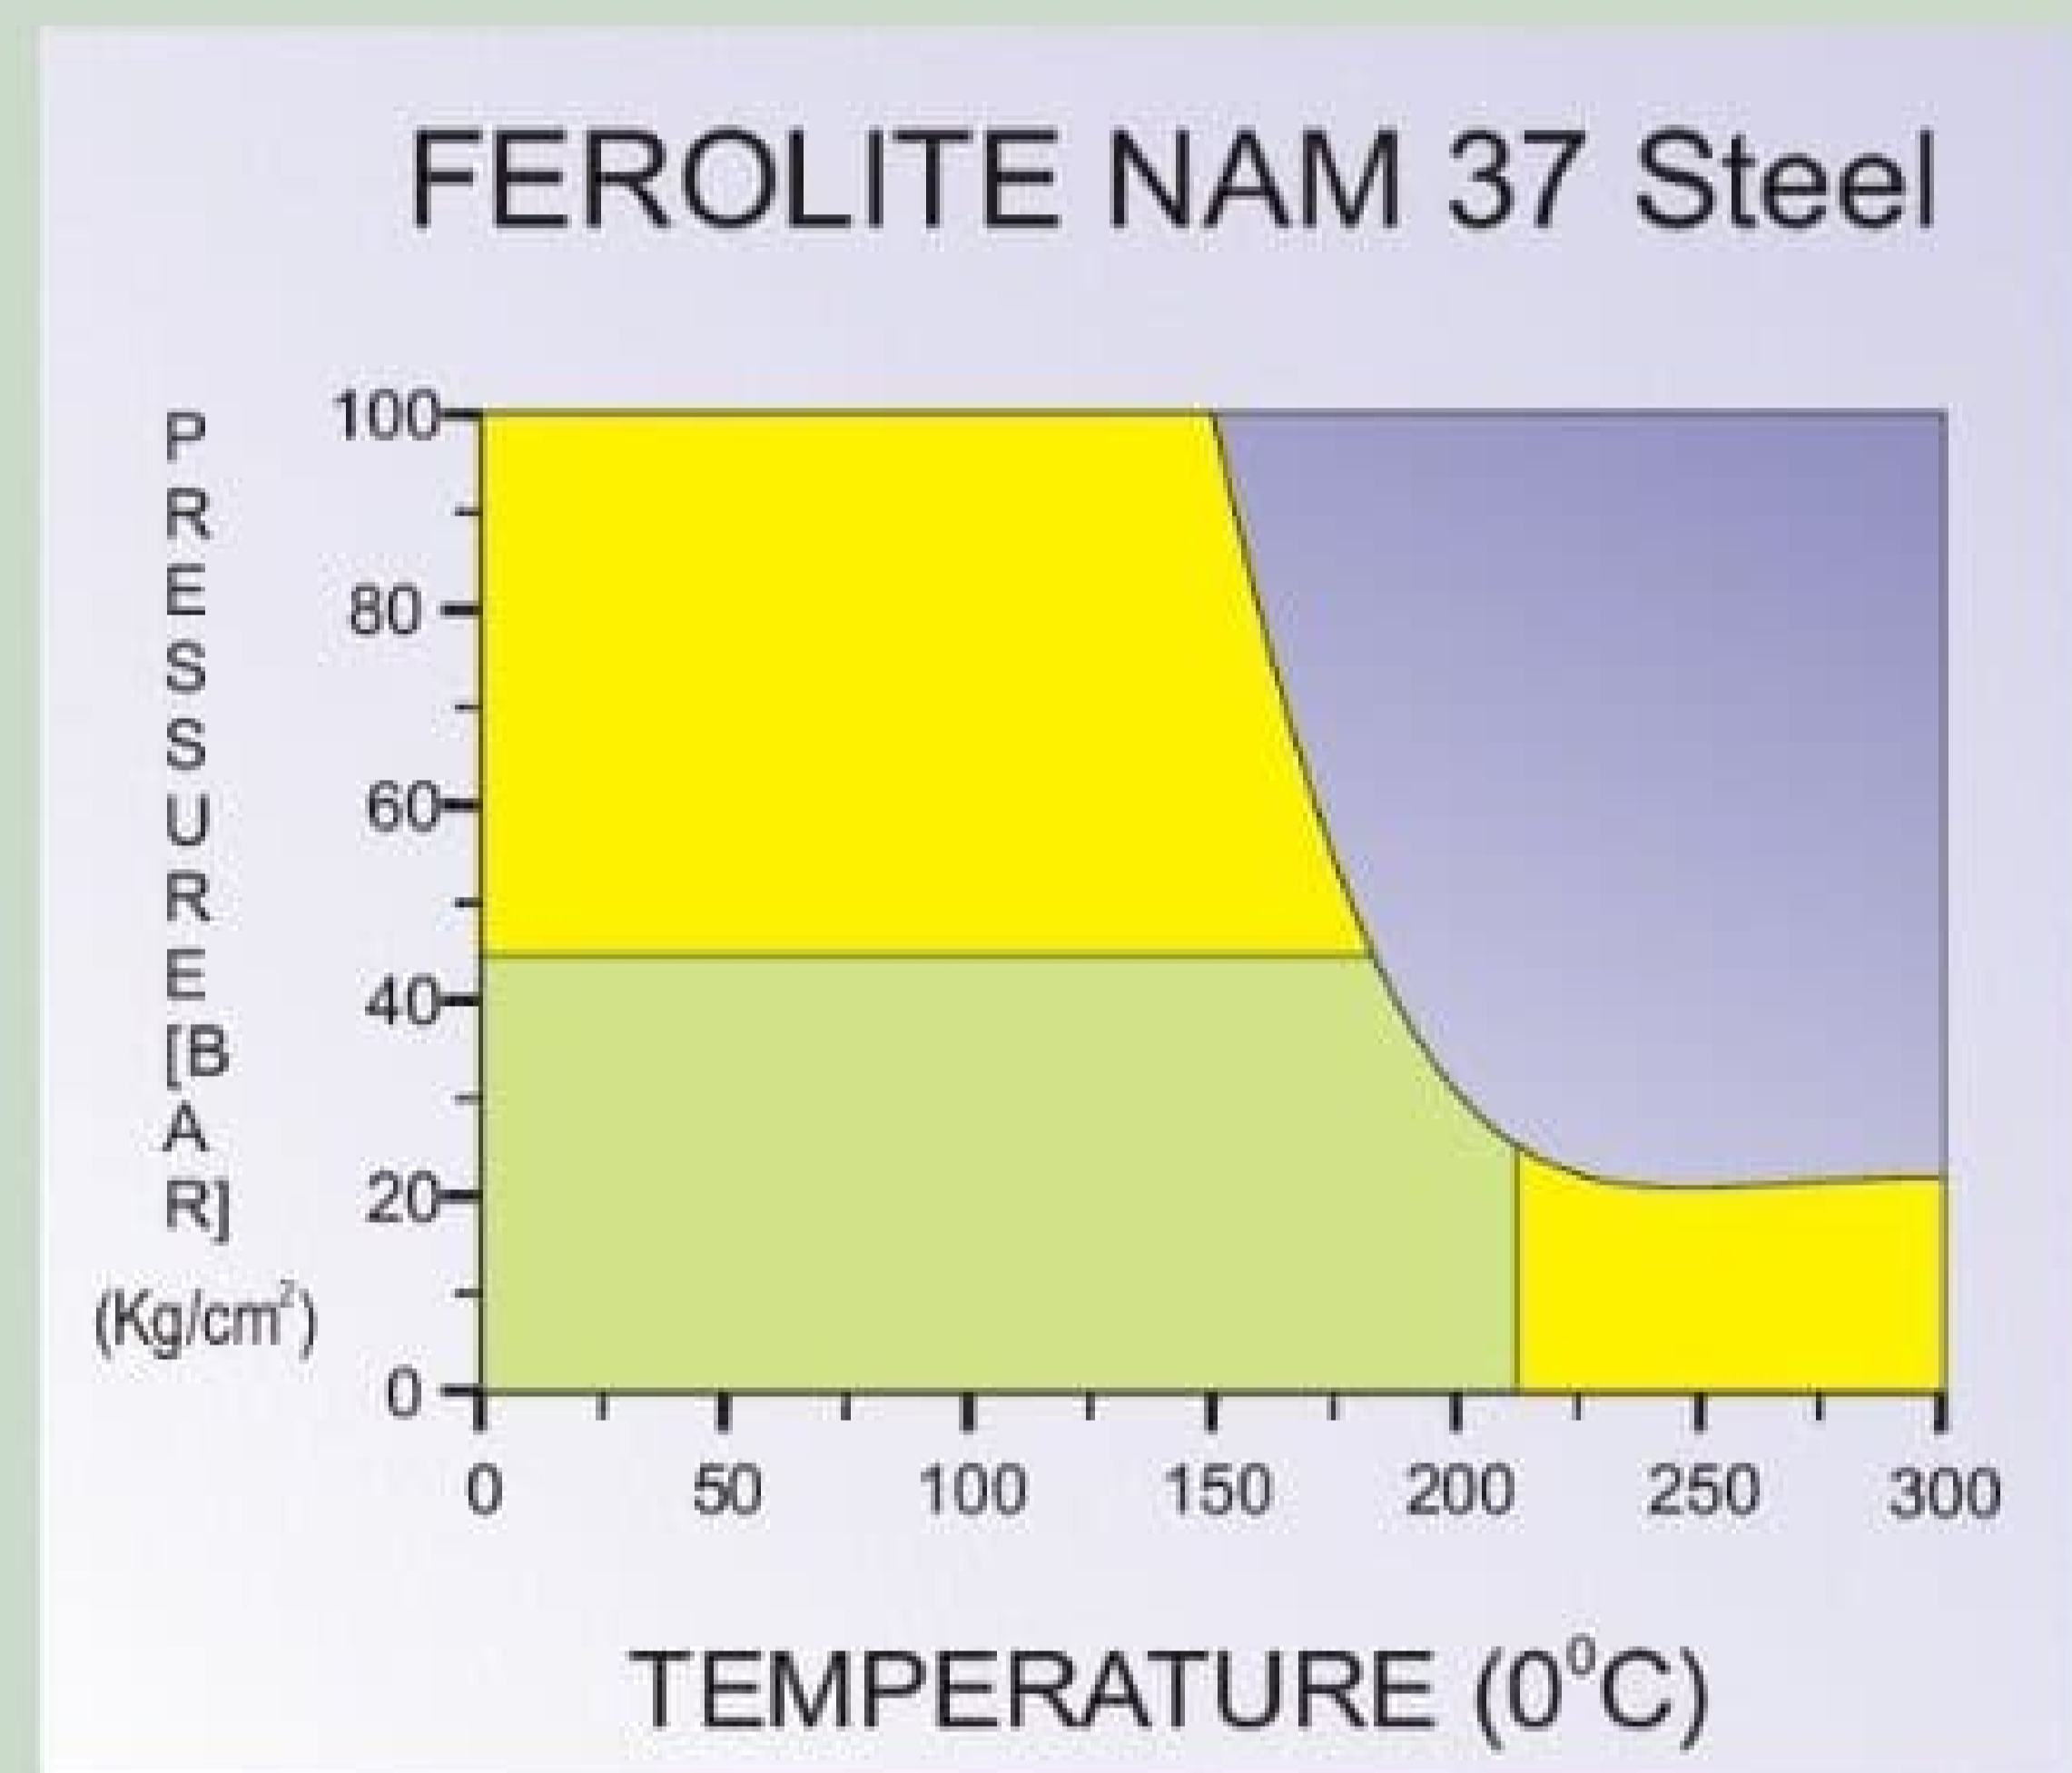

Physical Properties:

The following Information applies to material thickness 2.0 mm.

S.NO.	PROERTIES	TEST METHOD	UNIT	SPECIFIED VALUE
1.	DENSITY		gm/cm ³	1.70 - 2.10
2.	TENSILE STRENGTH			
	(a) ACC to ASTM F152(ACROSS GRAIN)		N/mm ²	> 8
	(b) ACC to DIN52910 (ACROSS GRAIN)		N/mm ²	> 5
3.	COMPRESSIBILITY	ASTM F36A	%	5 – 15
4.	RECOVERY	ASTM F36A	%	> 50
5.	FLUID ABSORPTION	ASTM F 146		
	(a) IN ASTM OIL NO. 3			
	INCREASE IN MASS		%	< 15
	INCREASE IN THICKNESS		%	< 10
	(b) IN FUEL B	ASTM F 146		
	INCREASE IN MASS		%	< 10
	INCREASE IN THICKNESS		%	< 10
	(c) IN WATER/ANTIFREEZE	ASTM F 146		
	INCREASE IN MASS		%	< 15
	INCREASE IN THICKNESS		%	< 15
6.	IGNITION LOSS	DIN 52911	%	< 32
7.	SEALABILITY AGAINST Nitrogen	DIN 3535	cm ³ /min.	< 1.0
8.	STRESS RESISTANCE			
	16h 300°C	DIN 52913	N/mm ²	-
	16h 175°C	DIN 52913	N/mm ²	-