



**ESMART<sup>®</sup> Reader**  
**STONE Series**

## Two dimensions, many opportunities



69 mm

### Gangbox

Gangbox housing is suitable for installation on any flat surfaces and features a big area for custom laser engraving



45 mm

### Mullion **NEW**

Mullion housing featuring width of 45 mm perfectly fits for door applications requiring a narrow reader

## Different technologies, one reader

### MIFARE® Classic

Works with MIFARE® Classic credentials reading the UID or Sector Data with Crypto 1 key encryption

### Bank cards

Supports reading of bank cards in different modes. Reading mode is determined by facility requirements

### NFC + BLE

Compatible with 2.4 GHz (BLE) and 13.56 MHz (NFC) mobile credentials powered by ESMART® Access on iOS and Android

### MIFARE® Plus

Works with MIFARE® Plus credentials reading the UID or Sector Data in SL3 mode with AES128 key encryption. Backward compatible with SL1 mode

### ISO14443A / ISO15693

Reads the UID from any ISO14443A and ISO15693 credentials in a range up to 15 cm

### ESMART® Access

Supports Secure Multi-layered credential technology with five degrees for data authenticity and privacy protection

## Access guarded



### ESMART® Access technology

- AES-128 encryption
- Diversification of encryption keys
- Credential CMAC signature
- Protection against Replay attacks
- Globally Unique User Identifier

#### iOS and Android

- Works via BLE
- Works via NFC



#### JCOP card

- Bank-level chip platform
- Applet for Access control
- Co-brand capabilities



## Mobile enabled

### ESMART® Access mobile application

Use your phone with a virtual card along with a regular smartcards in a more convenient way

#### iOS

Mobile identification works via BLE with iPhones thanks to secure ESMART® Access technology

#### Android

Depending on operation mode and phone model identification works via NFC or BLE



## Canvas for self-expression

### Individual housing color

DuPont Corian® device housing color palette consists of more than 100 colors.

Order devices that fit your interior concept perfectly

Order option:  
EO1720 – for Gangbox  
EO1520 – for Mullion



### Individual laser engraving

Option of individual laser engraving provides limitless possibilities of placing the brand logo or a suitable designer pattern all over the device surface

Order option:  
EO1780 – for Gangbox  
EO1580 – for Mullion



## Reader management in the field


### ESMART® Configurator mobile application

Access Control Administrators and Installers can manage ESMART® Readers right on the wall via BLE or NFC. It is possible to configure: Credentials reading modes, Wiegand output settings, BLE settings (range and reading frequency), LED and Buzzer behavior and other settings


### User Configurations **NEW**

Recently introduced opportunity to create User Configurations right in the mobile application for advanced users



 It is possible to order a batch of devices with individual configuration from the factory

Order option:  
EO1790 – for Gangbox  
EO1590 – for Mullion

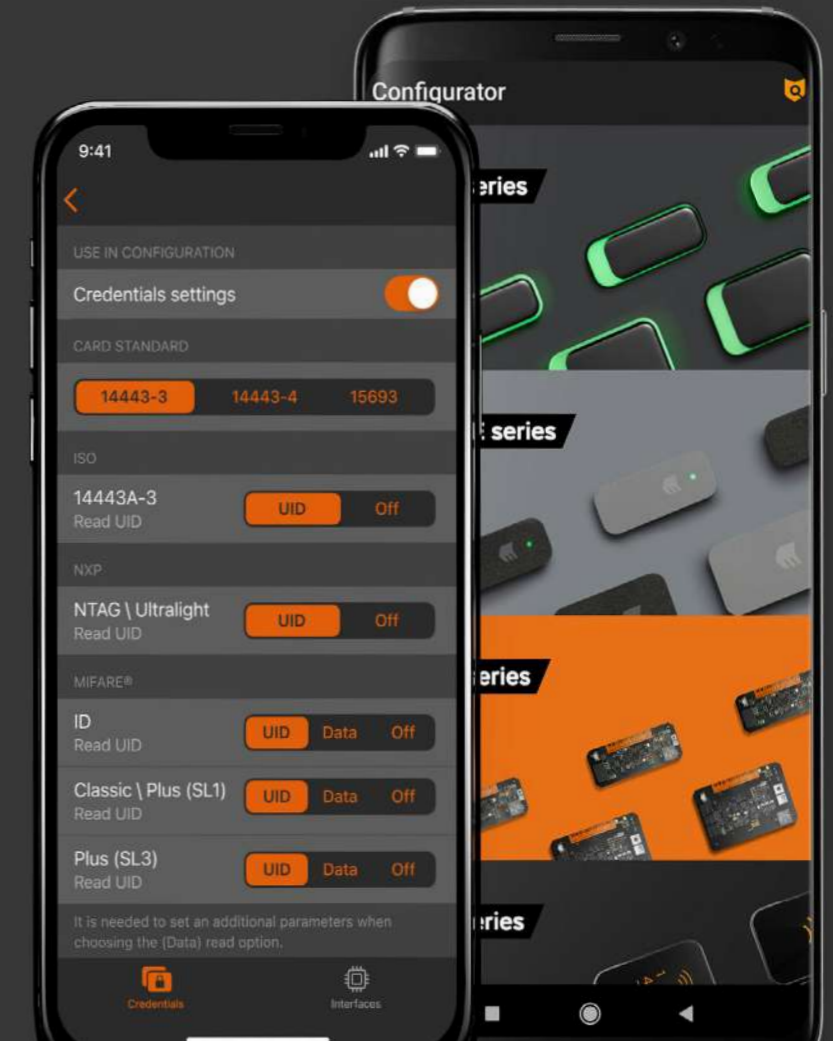

## Challenges. Accepted

### Metal Installation Kit

Installation on a metal surface reduces the reading range significantly. The special material of the Kit helps to restore up to 70 % of the original range.

Installation Kit is provided with adhesive surface. The Kit includes two plates. It is recommended to install one on another to achieve the maximum reading range

Order model:  
EA1140 – for Gangbox  
EA1540 – for Mullion



### Ingress Protection

ESMART® Reader is completely protected against ingress of moisture and dust according to IP68 standard



-40...+85 °C

The readers feature industrial temperature range and are completely protected against any weather challenges



## Perfect fit

### Expanded device Lineup **NEW**

The product line of ESMART® Reader series STONE has been supplemented with the LITE Lineup launch. Both product lines (BLE and LITE) are supplied in two housing dimensions (Gangbox and Mullion) featuring the same appearance and custom design capabilities. The devices differ functionally only.

Now you are able to combine the device models within one project to find an optimal and cost-effective solution perfectly fitting your project needs

### LITE Lineup

### BLE Lineup

<b>Mobile access</b>	Not supported	ESMART® Access via BLE and NFC
<b>Credentials</b>	ESMART® Access, MIFARE® Classic, Plus (SL1/SL3), ISO14443 (UID)	<b>LITE</b> + ISO15693 (UID)
<b>Bank cards</b>	Read the UID, MIFARE® emulation mode	<b>LITE</b> + Read the CPLC
<b>Reader management</b>	Via NFC	<b>LITE</b> + Via BLE
<b>Output</b>	Wiegand 26...58, custom	Wiegand 26...58, custom

# Housing colors collection



**Silverite**  
Order option: EO1722



**Silverite**  
Order option: EO1522



**Deep Titanium**  
Order option: EO1732



**Deep Titanium**  
Order option: EO1532



**Anthracite**  
Order option: EO1721



**Anthracite**  
Order option: EO1521



**Deep Cloud**  
Order option: EO1731



**Deep Cloud**  
Order option: EO1531



**Carbon Concrete**  
Order option: EO1726



**Carbon Concrete**  
Order option: EO1526



**Dove**  
Order option: EO1733



**Dove**  
Order option: EO1533



**Silver Gray**  
Order option: EO1729



**Silver Gray**  
Order option: EO1529



**Designer White**  
Order option: EO1728



**Designer White**  
Order option: EO1528



**Cosmos Prima**  
Order option: EO1724



**Cosmos Prima**  
Order option: EO1524



**Citrus Orange**  
Order option: EO1735



**Citrus Orange**  
Order option: EO1535



**Hot**  
Order option: EO1734



**Hot**  
Order option: EO1534



**Gray Onyx**  
Order option: EO1730



**Gray Onyx**  
Order option: EO1530





**Mahogany Nuwood**  
Order option: EO1740



**Mahogany Nuwood**  
Order option: EO1540



**Raffia**  
Order option: EO1727



**Raffia**  
Order option: EO1527



**Imperial Yellow**  
Order option: EO1736



**Imperial Yellow**  
Order option: EO1536



**Blooming Green**  
Order option: EO1737



**Blooming Green**  
Order option: EO1537



**Evening Prima**  
Order option: EO1725



**Evening Prima**  
Order option: EO1525



**Juniper**  
Order option: EO1739



**Juniper**  
Order option: EO1539



**Verdant**  
Order option: EO1723



**Verdant**  
Order option: EO1523



**Laguna**  
Order option: EO1738



**Laguna**  
Order option: EO1538

# Readers



Model	ER1711 <span>LITE</span>	ER1511 <span>LITE</span>	ER1701 <span>BLE</span>	ER1501 <span>BLE</span>
<b>Housing</b>	DuPont Corian®			
<b>Color</b>	Anthracite / Silverite / Custom			
<b>2.4 GHz (BLE) Credential Compatibility</b>	-		ESMART® Access Mobile Credentials	
<b>13.56 MHz (NFC) Credential Compatibility</b>	<ul style="list-style-type: none"> <li>ESMART® Access</li> <li>MIFARE® Classic, MIFARE® Plus (SL1 / SL3)</li> <li>ISO14443A</li> <li>Bank cards</li> </ul>		<ul style="list-style-type: none"> <li>ESMART® Access</li> <li>MIFARE® Classic, MIFARE® Plus (SL1 / SL3)</li> <li>ISO14443A and ISO15693</li> <li>ESMART® Access Mobile Credentials</li> <li>Bank cards</li> </ul>	
<b>Typical Read Range (NFC)</b>	Up to 4 in (10 cm)			
<b>Typical Read Range (BLE)</b>	-		Up to 33 ft (10 m)	
<b>Connection Interface</b>	Wiegand			
<b>Data Communication Format</b>	Wiegand 26, 34, 58, custom. Wiegand 26 in basic configuration			
<b>Pigtail Length</b>	18 in (0.5 m)			
<b>Operating Voltage</b>	5-16 VDC			
<b>Current Draw</b>	Peak: 150 mA at 12V			
<b>Device Input</b>	Input: Four-mode LED (RLED, GLED), Buzzer (BUZZ) @ Active Low			
<b>Device Management</b>	Via NFC only using Master Card		Via NFC using Master Card and via BLE	
<b>Configuration capabilities with ESMART® Configurator mobile application</b>	<ul style="list-style-type: none"> <li>ISO 14443-3: UID / Off</li> <li>ISO 14443-4: UID / Off</li> <li>NTAG / Ultralight: UID / Off</li> <li>MIFARE® Classic / Plus (SL1): UID / DATA / Off</li> <li>MIFARE® Plus (SL3): UID / DATA / Off</li> <li>Bank cards: UID / Off</li> </ul>		<ul style="list-style-type: none"> <li>MIFARE® DESFire: UID / Off</li> <li>ESMART® Access NFC HCE: On / Off</li> <li>ESMART® Access JCOP: On / Off</li> <li>RGB LED and Buzzer settings</li> <li>Sector number, block number, data length and offset. Encryption keys.</li> <li>Data format, quantity and byte order transmitted through Wiegand interface, parity bits</li> </ul>	
<b>Mounting</b>	Flat surface	Door installations	Flat surface	Door installations
<b>Dimensions (width x length x depth)</b>	4.45 x 2.71 x 0.39 in (113 x 69 x 10 mm)	4.45 x 1.70 x 0.39 in (113 x 45 x 10 mm)	4.45 x 2.71 x 0.39 in (113 x 69 x 10 mm)	4.45 x 1.70 x 0.39 in (113 x 45 x 10 mm)
<b>Product Weight</b>	4.9 oz (139 g)	3.5 oz (100 g)	4.9 oz (139 g)	3.5 oz (100 g)
<b>Operating Temperature &amp; Humidity</b>	-40° F to +185° F (-40° C to +85° C), 0% to 95% non-condensing			
<b>Storage Temperature</b>	-40° F to +185° F (-40° C to +85° C)			
<b>Ingress Protection</b>	According to IP68			
<b>Supplied parts</b>	Reader (1), Master Card (1), Installation kit (1), Installation Guide (1)			
<b>Regulatory</b>	EAC			
<b>Warranty</b>	Limited Lifetime			

# Options

Option	Gangbox	Mullion
Anthracite color (base)	EO1721	EO1521
Silverite color	EO1722	EO1522
Verdant color	EO1723	EO1523
Cosmos Prima color	EO1724	EO1524
Evening Prima color	EO1725	EO1525
Carbon Concrete color	EO1726	EO1526
Raffia color	EO1727	EO1527
Designer White color	EO1728	EO1528
Silver Gray color	EO1729	EO1529
Gray Onyx color	EO1730	EO1530
Mahogany Nuwood color	EO1740	EO1540
Laguna color	EO1738	EO1538
Juniper color	EO1739	EO1539
Imperial Yellow color	EO1736	EO1536
Hot color	EO1734	EO1534
Dove color	EO1733	EO1533
Deep Titanium color	EO1732	EO1532
Deep Cloud color	EO1731	EO1531
Citrus Orange color	EO1735	EO1535
Blooming Green color	EO1737	EO1537
Individual housing color	EO1720	EO1520
Individual laser engraving	EO1780	EO1580
Individual configuration	EO1790	EO1590

# Accessories



Model	EA1140	EA1540
Supplied parts	Ferrite plate (2)	
Dimensions (width x length x depth)	4.4 x 2.7 x 0.03 in (113 x 69 x 1 mm)	4.4 x 1.7 x 0.03 in (113 x 45 x 1 mm)
Product Weight	0.2 oz (7 g)	0.18 oz (5 g)
Working temperature and humidity	-40° F to +185° F (-40° C to +85° C), 0% to 95% non-condensing	
Storage temperature	-40° F to +185° F (-40° C to +85° C)	
Warranty	Limited Lifetime	