


Asbestos Gasket Jointing Sheet Without Wire

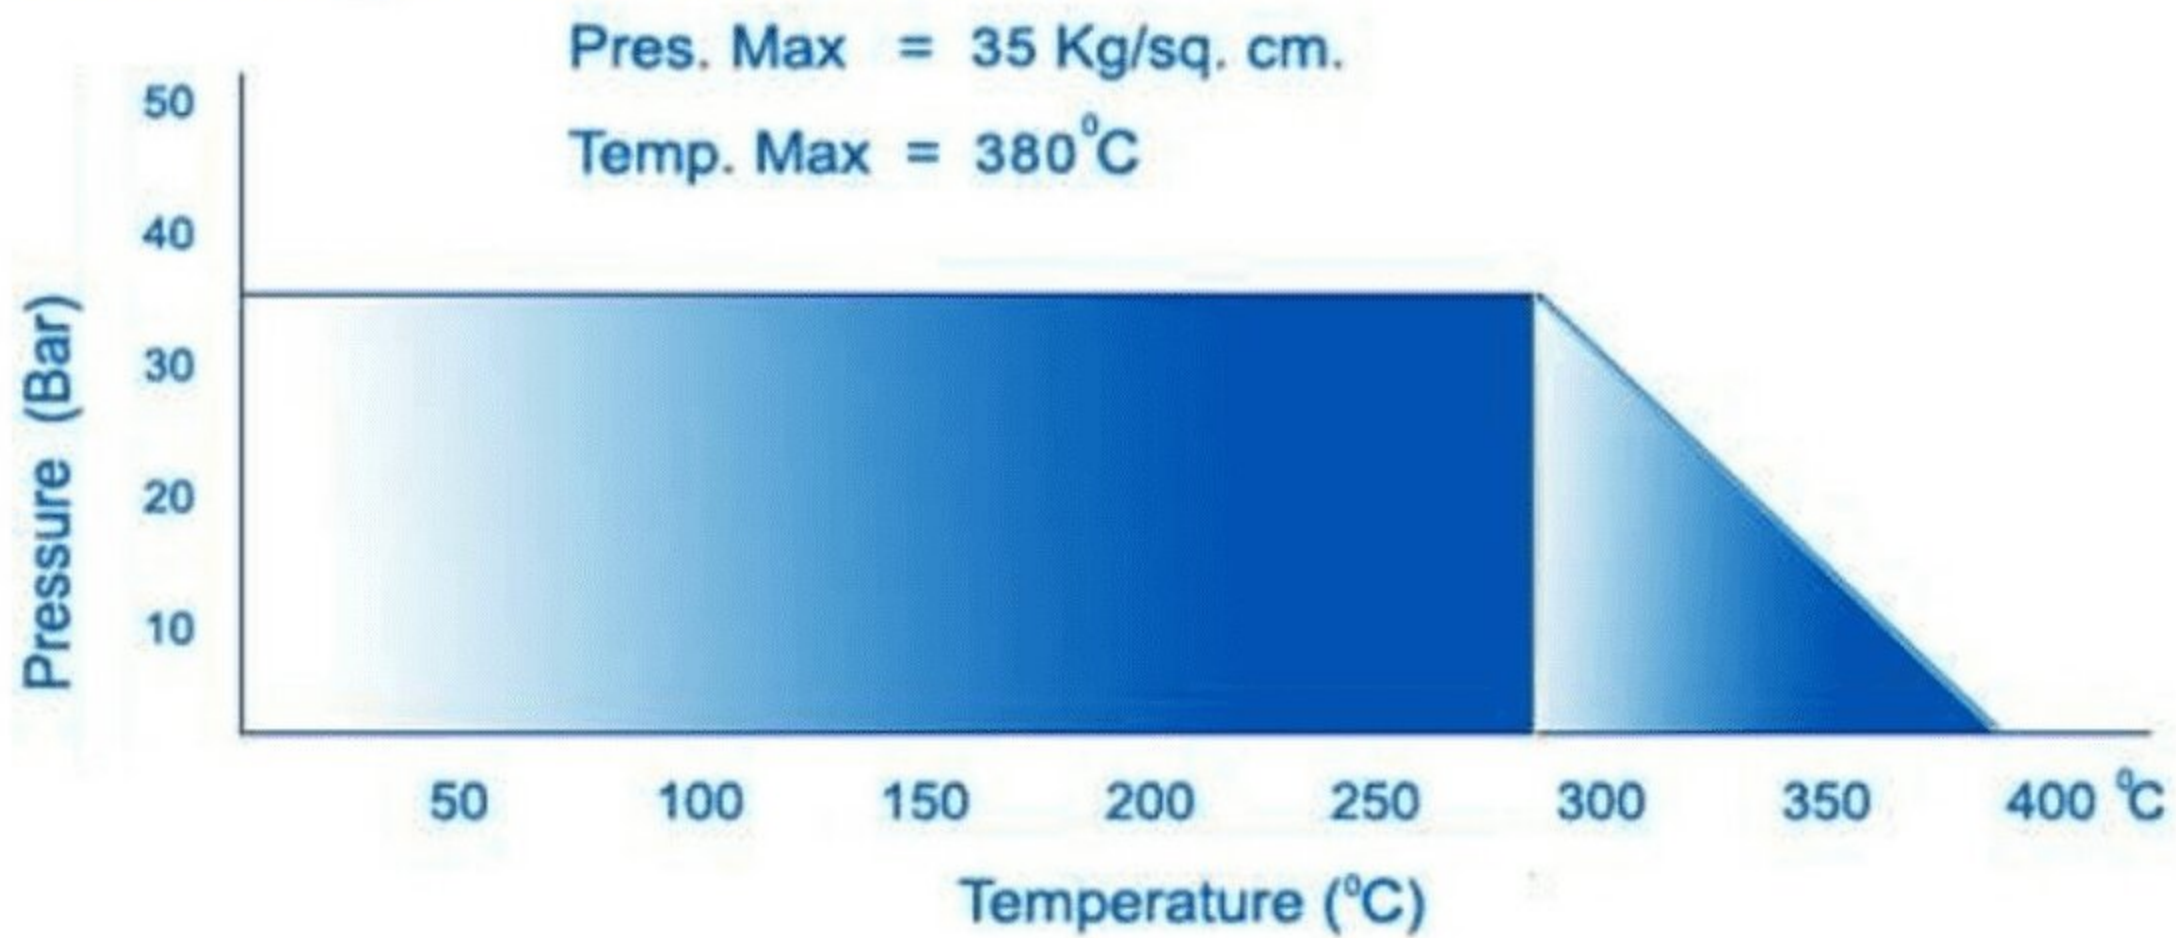

Material Composition:

Made from Chrysotile Asbestos Fiber, Mineral fibre & Natural Rubber

Applications:

To Seal off Steam, Air, Water , various alkaline chemicals Under low stress conditions.



MATERIAL TYPE	:	COMPRESSED ASBESTOS FIBER (CAF)
THICKNESS	:	0.25, 0.5mm, 0.8mm, 1mm, 1.5mm, 2mm, 3mm, 4mm, 5mm, 6mm (OTHER THICKNESS ON REQUEST)
SURFACE FINISH	:	Red, Grey , Graphited (OTHER COLORS ON REQUEST)
DIMENSIONS OF SHEETS	:	1500MM X3100MM, 1500MM X1500MM, 1500MM X 1000MM, 1500MM X 2000MM, 1270MM X1270MM, 1270MM X 3810MM, 3000MM X 3000MM
OPERATING CONDITION	:	Maximum pressure : 35 Bar Maximum Temperature: 350
SPECIFICATION COMPLIANCE	:	IS: 2712 / 1998 GRADE W / 3

NOTE

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide variety of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.