Asbestos Gasket Jointing Sheet With Wire

Pres. Max = 90 Kg/sq. cm.
Temp. Max = 480°C

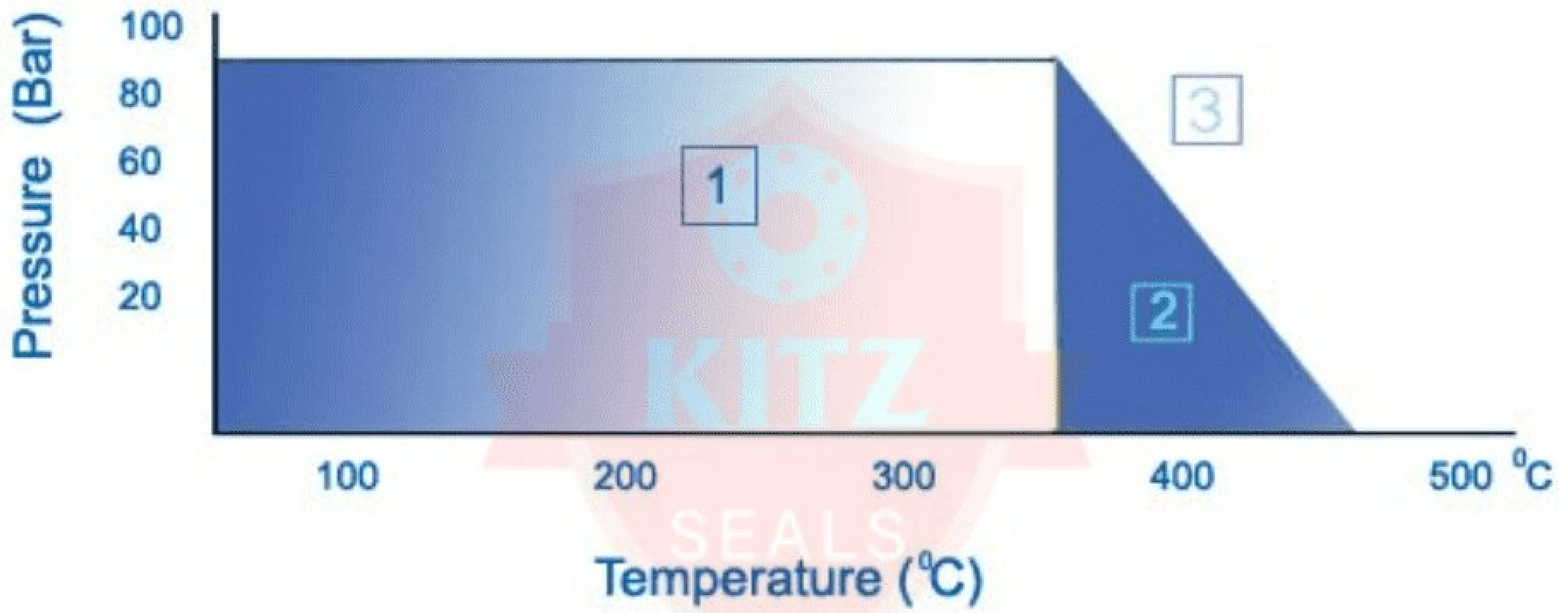

Material Composition:

Made from Chrysotite Asbestos Fiber with Synthetic Elastomers with MS Wire Rinforced.

Applications:

To seal off steam, Air, Water, Natural gas, Petrol, Saline solution, Alkalies ammonia & several other non-aggressive media under medium conditions.

THICKNESS	:	0.80 mm to 6.00 mm.
SURFACE FINISH	:	Grey, Graphited
DIMESNSION OF SHEETS	:	1500MM X3100MM, 1500MM X1500MM, 1500MM X 1000MM, 1500MM X 2000MM, 1270MM X1270MM, 1270MM X 3810MM
OPERATING CONDITION	:	Maximum pressure : 90 Kg/cm2 Maximum Temperature: 450°C

NOTE

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide varsity of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.