Asbestos Gasket Jointing Shet Without Wire

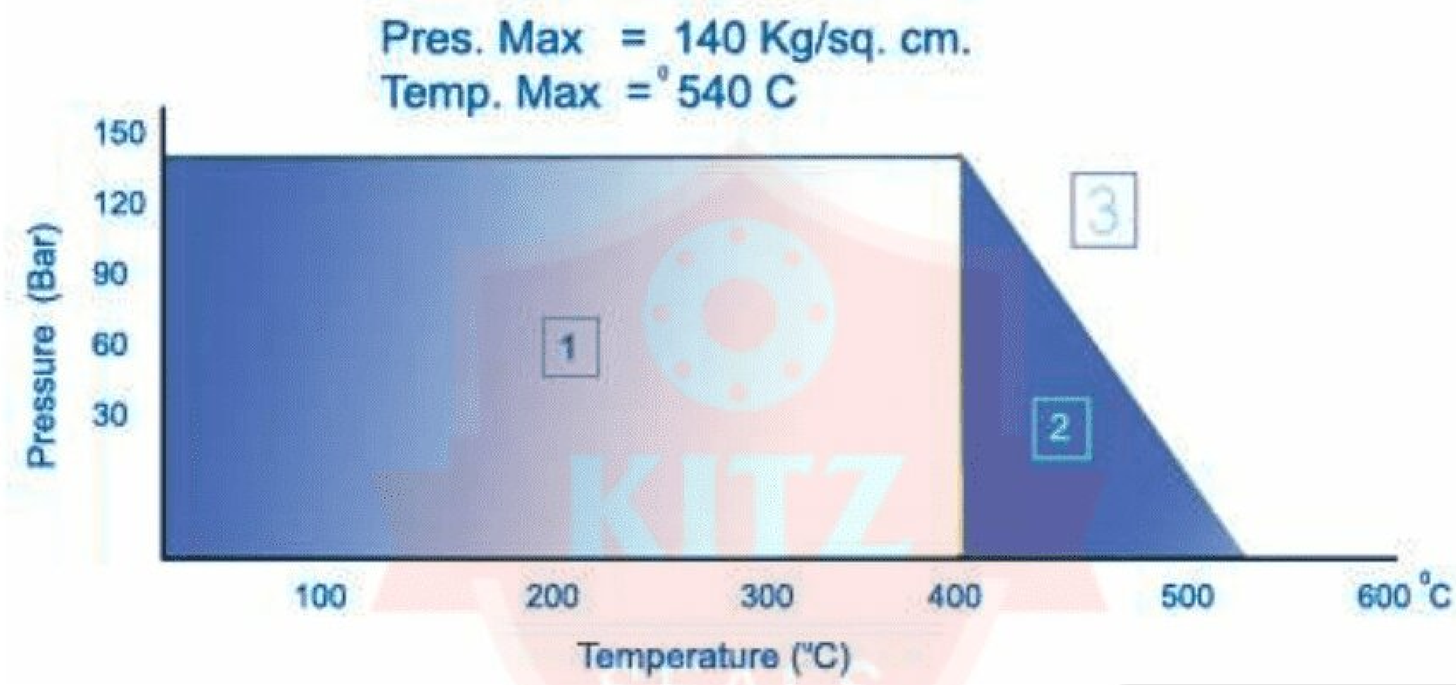

Material Composition:

Made from Chrysotile Asbestos Fiber with Synthetic & Natural Elastomers and Inorganic fillers.

Applications:

To seal off Air, Water, Steam, Natural gas, Petrol, Saline solution, Alkalies, Ammonia, propane gas & week acids under high stress conditions

MATERIAL TYPE	:	**COMPRESSED ASBESTOS FIBER (CAF)**
THICKNESS	:	0..25, 0.5mm, 0.8mm, 1mm, 1.5mm, 2mm, 3mm, 4mm, 5mmm , 6mm (OTHER THICKNESS ON REQUEST)
SURFACE FINISH	:	Red, Grey , Graphited (OTHER COLORS ON REQUEST)
DIMESNSION OF SHEETS		1500MM X3100MM, 1500MM X1500MM, 1500MM X 1000MM, 1500MM X 2000MM, 1270MM X1270MM, 1270MM X 3810MM, 3000MM X 3000MM
OPERATING CONDITION	:	Maximum pressure : 150 Bar Maximum Temperature: 550°C
SPECIFICATION COMPLIANCE	:	IS: 2712 / 1998 GRADE W / 1

NOTE

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide varsity of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.