Asbestos Gasket Joitning Sheet Without Wire

Pres. Max = 20 Kg/sq. cm.
Temp. Max = 150°C

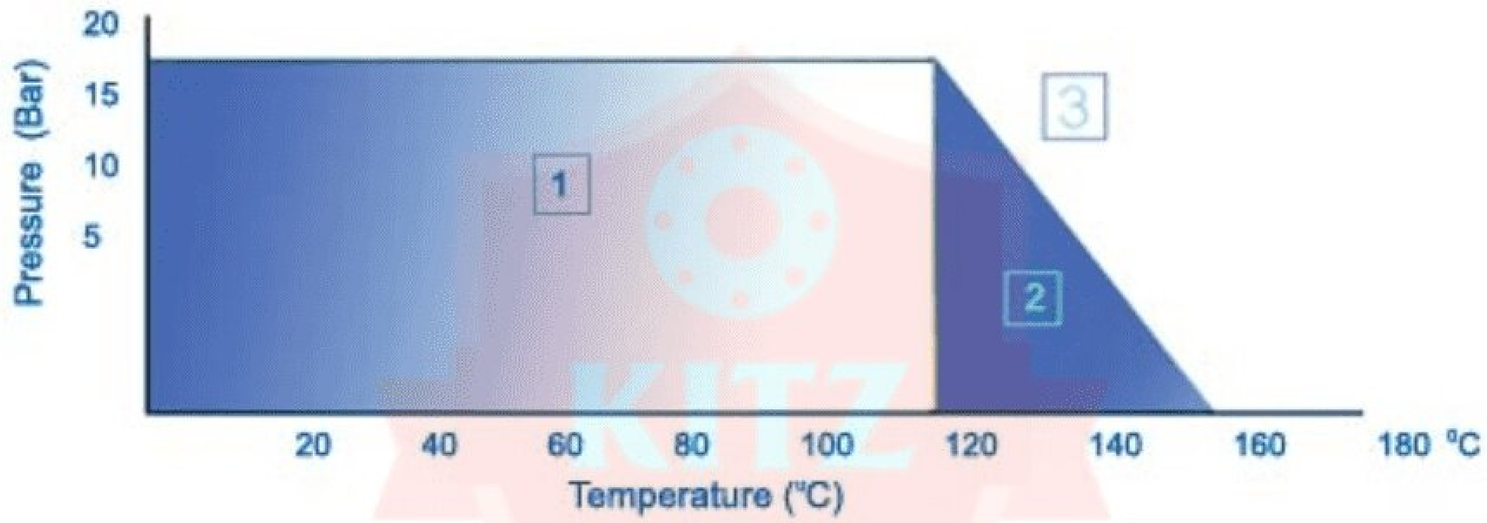

Material Composition:

Made from Chrysotite Asbestos Fiber with Synthetic Elastomers and Inorganic fillers.

Applications:

To seal of aggressive organic acids alkalies, alcohals, easters & ketones.

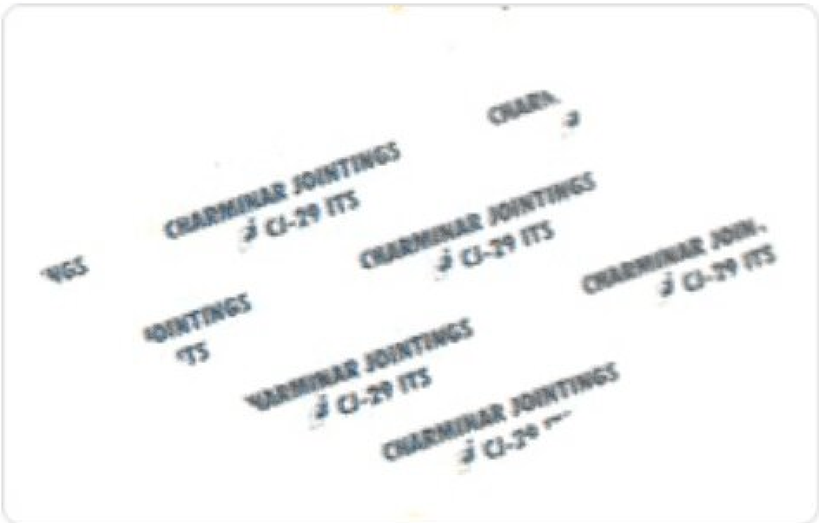

THICKNESS	:	0..25, 0.5mm, 0.8mm, 1mm, 1.5mm, 2mm, 3mm, 4mm, 5mmm , 6mm (OTHER THICKNESS ON REQUEST)
SURFACE FINISH	:	White
DIMESNSION OF SHEETS	:	1500MM X3100MM, 1500MM X1500MM, 1500MM X 1000MM, 1500MM X 2000MM, 1270MM X1270MM, 1270MM X 3810MM, 3000MM X 3000MM
OPERATING CONDITION	:	Maximum pressure : 20 Bar Maximum Temperature : 150°C
SPECIFICATION COMPLIANCE	:	DIN : 3754 IT “S”

NOTE

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide varsity of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.