Asbestos Gasket Jointing Sheet With Wire

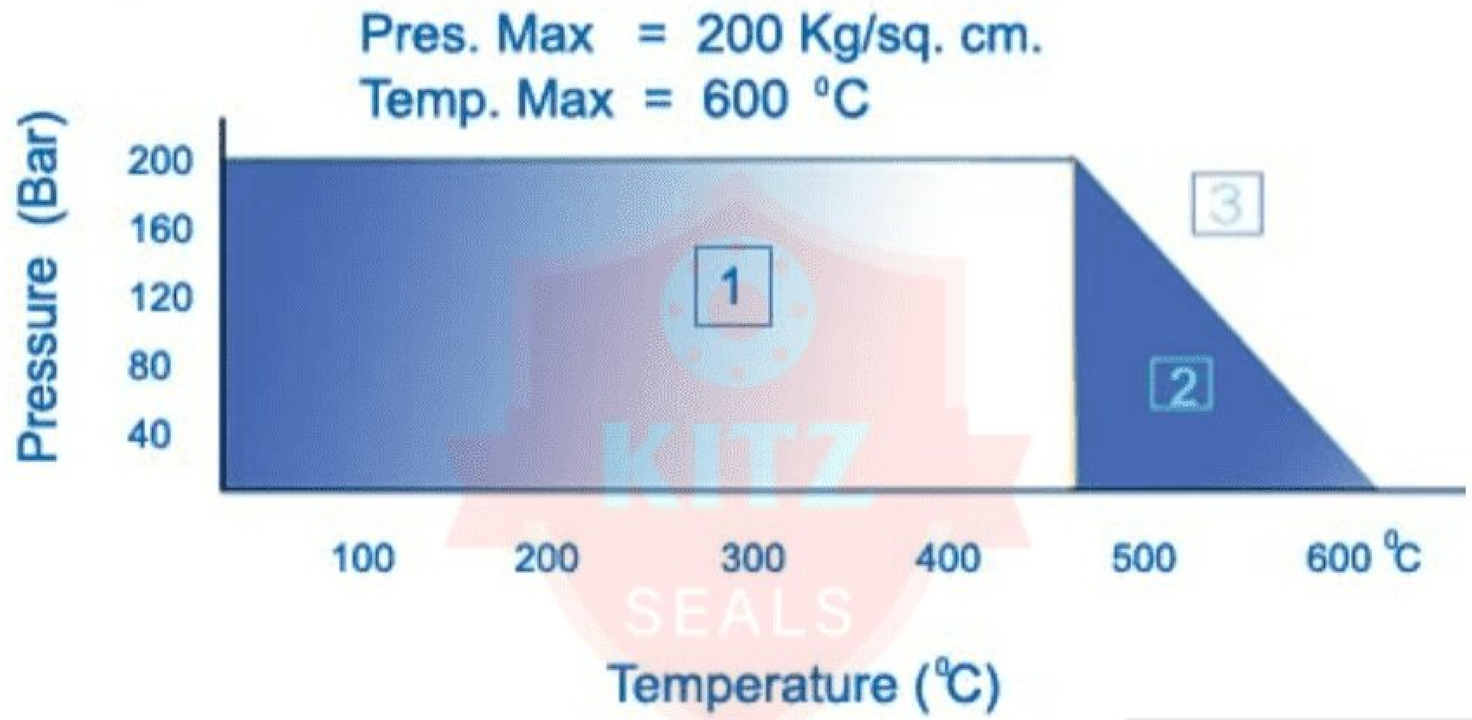

Material Composition:

Made from Chrysotite Asbestos Fiber with Synthetic Oil & Solvent resistant elastomers with MS Wire Reinforced

Applications:

To seal off alcohols, water, air, steam, oils, fuels, etc. This grade is specially suitable for internal combustion engines, compressors, pipe - lines and several other industrial applications under high stress conditions

THICKNESS	:	0.60 mm to 6.00 mm.
SURFACE FINISH	:	Grey, Graphited
DIMESNSION OF SHEETS	:	1500MM X3100MM, 1500MM X1500MM, 1500MM X 1000MM, 1500MM X 2000MM, 1270MM X1270MM, 1270MM X 3810MM
OPERATING CONDITION	:	Maximum pressure : 200 Kg/cm2 Maximum Temperature : 600°C

NOTE

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide varsity of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.