



TAIWAN METERS
TAIWAN SAFTY CONTROLS

Wiring Accessories (Cable Lug)





Điện City
Connect & Innovate

CÔNG TY TNHH THƯƠNG MẠI KỸ THUẬT ĐIỆN CITY

Nhà phân phối thiết bị điện công nghiệp hàng đầu Việt Nam

TUOH

KAKU[®]

INOVANCE

IDEC

Think Automation and beyond...

FE Fuji Electric
Innovating Energy Technology

**MITSUBISHI
ELECTRIC**
Changes for the Better

T TAIWAN METERS



LIÊN HỆ VỚI CHÚNG TÔI

Địa chỉ: 125 Phú Châu, KP1, P. Tam Bình,
TP. Thủ Đức, TP. HCM

Hotline: 0909 808 905 (Zalo)



Email: minh.diencity@gmail.com

Website: diencity.com



Copper Tube terminals

mm

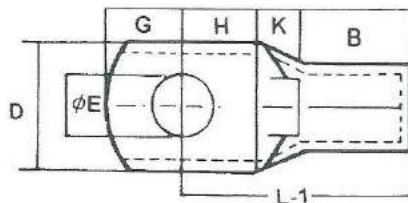

Manufactured from soft drawn pure copper tube to JIS-H3300, C 1020T-0 (Oxygen-Free Copper) which gives the best properties possible.

A complete range terminals, ranging from 1.5mm² to 1000mm² with cable inspection hole.

ITEM NO.	CABLE SQ.	STUD HOLD SIZE	DIMENSIONS										
			ØE	ØA	C	D	F	G	H	K	B	L-1	J
C1.5-4 C1.5-5	1.5		4.3	1.8	3.7	8.0	1.0	4	5	2	5	12	16
			5.3	1.8	3.7	8.0	1.0	4	5	2	5	12	16
C2.5-4 C2.5-5 C2.5-6	2.5		4.3	2.4	4.0	8.0	1.0	4	5	2	7	14	18
			5.3	2.4	4.0	10.0	0.8	5	6	2	7	15	20
			6.4	2.4	4.0	10.0	0.8	5	6	2	7	15	20
C4-5 C4-6	4		5.3	3.1	4.8	10.0	1.0	5	6	2	7	15	20
			6.4	3.1	4.8	10.0	1.0	5	6	2	7	15	20
C6-5 C6-6 C6-8	6		5.3	3.8	5.5	10.0	1.2	5	6	3	9	18	24
			6.4	3.8	5.5	12.0	1.0	6	9	3	9	21	24
			8.4	3.8	5.5	12.0	1.0	6	9	3	9	21	26
C10-6 C10-8	10		6.4	4.5	6.2	12.0	1.2	6	7	3	9	19	27
			8.4	4.5	6.2	12.0	1.2	6	9	3	9	21	27
C16-6 C16-8	16		6.4	5.4	7.1	12.0	1.4	7	7	4	12	23	30
			8.4	5.4	7.1	12.0	1.4	7	7	4	12	25	30
C25-6 C25-8 C25-10	25		6.4	6.8	8.8	13.0	2.0	7	7	4	12	23	33
			8.4	6.8	8.8	18.0	1.4	10	11	4	12	27	33
			10.5	6.8	8.8	18.0	1.4	10	11	4	12	27	33
C35-6 C35-8 C35-10	35		6.4	8.2	10.6	15.3	2.4	9	9	5	12	26	38
			8.4	8.2	10.6	15.3	2.4	9	9	5	12	26	38
			10.5	8.2	10.6	18.0	2.0	10	11	5	12	28	39
C50-8 C50-10	50		8.4	9.5	12.4	17.8	2.9	10	11	6	16	33	45
			10.5	9.5	12.4	17.8	2.9	10	11	6	16	33	45
C70-8 C70-10 C70-12	70		8.4	11.2	14.7	21.0	3.5	12	13	7	23	38	50
			10.5	11.2	14.7	21.0	3.5	12	13	7	23	38	50
			13.0	11.2	14.7	21.0	3.5	12	13	7	23	38	50
C95-10 C95-12	95		10.5	13.5	17.4	25.0	3.9	13	13	9	28	42	55
			13.0	13.5	17.4	25.0	3.9	13	13	9	28	42	55
C120-12 C120-16	120		13.0	15	19.4	28.0	4.4	14	14	10	22	46	63
			17.0	15	19.4	28.0	4.4	16	16	10	22	48	63
C150-12 C150-16	150		13.0	16.5	21.2	30.0	4.7	16	16	11	26	53	70
			17.0	16.5	21.2	30.0	4.7	16	16	11	26	53	70
C185-16	185		17.0	18.5	23.5	34.0	5.0	17	17	12	32	61	75
C240-16 C240-20	240		17.0	21	26.5	38.0	5.5	20	20	14	38	72	90
			21.0	21	26.5	38.0	5.5	20	20	14	38	72	90
C300-16 C300-20	300		17.0	23.5	30.0	43.0	6.5	22	22	15	42	79	98
			21.0	23.5	30.0	43.0	6.5	22	22	15	42	79	98
C400-16 C400-20	400		17.0	28.5	36.5	50.1	8.0	26	26	18	44	88	110
			21.0	28.5	36.5	50.1	8.0	26	26	18	44	88	110
C500-16 C500-20	500		17.0	30.0	39.0	56.0	9.0	28	28	20	48	96	120
			21.0	30.0	39.0	56.0	9.0	28	28	20	48	96	120
C630-20	630		21.0	35.0	45.0	65.0	10.0	33	33	22	56	111	140
C800-BL	800	—		39.0	50.6	73.5	11.6	—	—	17	78	—	170
C1000-BL	1000	—		43.0	56.2	81.0	13.2	—	—	20	90	—	200

Cable Ties



Cable Ties

Part No.		Approx. Length mm (inch)	Approx. Width mm (inch)	Max. Bundle Dia. mm (inch)	Min. Tensile Strength kgs (lbs)
100pcs	1000pcs				
SE-80MH	SE-80M	80 (3.1)	2.5 (0.10)	15 (0.6)	8.0 (17.6)
SE-90MH	SE-90M	90 (3.5)	2.5 (0.10)	15 (0.6)	
SE-100MH	SE-100M	102 (4.0)	2.5 (0.10)	18 (0.7)	
SE-120MH	SE-120M	120 (4.7)	2.5 (0.10)	24 (1.0)	
SE-140MH	SE-140M	140 (5.5)	2.5 (0.10)	33 (1.3)	
SE-160MH	SE-160M	160 (6.3)	2.5 (0.10)	40 (1.6)	
SE-200MH	SE-200M	200 (7.9)	2.5 (0.10)	50 (2.0)	
SE-140IH	SE-140I	140 (5.5)	3.6 (0.14)	33 (1.3)	18.2 (40.0)
SE-150IH	SE-150I	150 (5.9)	3.6 (0.14)	35 (1.3)	
SE-180IH	SE-180I	180 (7.1)	3.6 (0.14)	44 (1.7)	
SE-200IH	SE-200I	200 (7.9)	3.6 (0.14)	50 (2.0)	
SE-250IH	SE-250I	250 (9.8)	3.6 (0.14)	65 (2.6)	
SE-300IH	SE-300I	300 (11.8)	3.6 (0.14)	76 (3.0)	
SE-370IH		368 (14.5)	3.6 (0.14)	102 (4.0)	
SE-120SH	SE-120S	120 (4.7)	4.8 (0.19)	24 (1.0)	22.2 (50.0)
SE-160SH	SE-160S	160 (6.3)	4.8 (0.19)	38 (1.5)	
SE-180SH	SE-180S	179 (7.0)	4.8 (0.19)	41 (1.6)	
SE-190SH	SE-190S	188 (7.4)	4.8 (0.19)	43 (1.7)	
SE-200SH	SE-200S	200 (7.9)	4.8 (0.19)	50 (2.0)	
SE-250SH	SE-250S	250 (9.8)	4.8 (0.19)	66 (2.6)	
SE-300SH	SE-300S	300 (11.8)	4.8 (0.19)	76 (3.0)	
SE-370SH		370 (14.5)	4.8 (0.19)	102 (4.0)	
SE-390SH		390 (15.3)	4.8 (0.19)	105 (4.1)	
SE-430SH		430 (16.9)	4.8 (0.19)	110 (4.3)	
SE-450SH		450 (17.7)	4.8 (0.19)	116 (4.6)	
SE-530SH		530 (20.9)	4.8 (0.19)	140 (5.5)	
SE-150HD		150 (5.9)	7.6 (0.30)	36 (1.4)	54.5 (120)
SE-200HD		200 (7.9)	7.6 (0.30)	50 (2.0)	
SE-300HD		298 (11.7)	7.6 (0.30)	76 (3.0)	
SE-370HD		368 (14.5)	7.6 (0.30)	102 (4.0)	
SE-430HD		430 (16.9)	9.0 (0.35)	110 (4.3)	79.4 (175)
SE-530HD		530 (20.9)	9.0 (0.35)	140 (5.5)	
SE-710HD		710 (28.0)	9.0 (0.35)	190 (7.5)	
SE-780HD		775 (30.5)	9.0 (0.35)	228 (9.0)	
SE-810HD		812 (32.0)	9.0 (0.35)	239 (9.4)	
SE-1020HD		1020 (40.0)	9.0 (0.35)	295 (12.0)	

Extra Heavy Duty Ties


Part No.	Approx. Length mm (inch)	Approx. Width mm (inch)	Max. Bundle Dia. mm (inch)	Min. Tensile Strength kgs (lbs)
100pcs				
SE-230EHD	230 (9.0)	13 (0.51)	50 (2.0)	114 (250)
SE-380EHD	380 (15.0)	13 (0.51)	98 (3.9)	
SE-480EHD	480 (18.8)	13 (0.51)	120 (4.7)	
SE-580EHD	580 (22.8)	13 (0.51)	152 (6.0)	
SE-730EHD	730 (28.7)	13 (0.51)	204 (8.0)	
SE-830EHD	830 (32.7)	13 (0.51)	232 (9.1)	
SE-880EHD	880 (34.6)	13 (0.51)	248 (10.1)	
SE-1030EHD	1030 (40.5)	13 (0.51)	295 (12.0)	

Lashing Ties

Part No.	Approx. Length mm (inch)	Approx. Width mm (inch)	Max. Bundle Dia. mm (inch)	Min. Tensile Strength kgs (lbs)
100pcs				
SE-240LT	240 (9.5)	13 (0.51)	50 (2.0)	114 (250)
SE-390LT	390 (15.4)	13 (0.51)	98 (3.9)	
SE-490LT	490 (18.3)	13 (0.51)	120 (4.7)	
SE-590LT	590 (23.2)	13 (0.51)	152 (6.0)	
SE-890LT	890 (35.0)	13 (0.51)	248 (10.0)	
SE-1040LT	1040 (41.0)	13 (0.51)	295 (12.0)	



Wiring Ducts



Plastic Wiring Ducts

- Material: Rigid, PVC
- Self-extinguishing
- Length: 1.7M and 2M
- Colors: Gray



- Material: Rigid, PVC
- Self-extinguishing
- Length: 1.7M and 2M
- Color: Gray



W: Over 72 mm

W: Under 65 mm



B: 8 mm



M: 6 mm





S: 4 mm



Part NO.	Slotted size			Dimensions W x H mm
	8mm	6mm	4mm	
PDB-1525	PDB-1525	PDS-1525		15 x 25
PDB-2525	PDM-2525	PDS-2525		25 x 25
PDB-2545	PDM-2545	PDS-2545		25 x 45
PDB-3333	PDM-3333	PDS-3333		33 x 33
PDB-3345	PDM-3345	PDS-3345		33 x 45
PDB-4040	PDM-4040	PDS-4040		40 x 40
PDB-4545	PDM-4545	PDS-4545		45 x 45
PDB-5050	PDM-5050	PDS-5050		50 x 50
PDB-6545	PDM-6545	PDS-6545		65 x 45
PDB-2565	PDM-2565	PDS-2565		25 x 65
PDB-3365	PDM-3365	PDS-3365		33 x 65
PDB-4565	PDM-4565	PDS-4565		45 x 65
PDB-6060	PDM-6060	PDS-6060		60 x 60
PDB-6565	PDM-6565	PDS-6565		65 x 65
PDB-7264				72 x 64
PDB-4080				40 x 80
PDB-6080				60 x 80
PDB-8080				80 x 80
PDB-33100				33 x 100
PDB-48100				48 x 100
PDB-70100				70 x 100
PDB-10060				100 x 60
PDB-100100				100 x 100
PDB-15075				150 x 75

Telephone Wiring Ducts

- Material : Rigid, PVC
- Length : 1M
- Colors : Gray, Ivory, White





Part No.	Dimensions		
	W1	W2	W3
TWD-1	6	7	4
TWD-2	8	10	6
TWD-3	10	11	7
TWD-4	12	15	10
TWD-5	10	17	13
TWD-6	11	18	16
TWD-8	30	37	15



Part No.	Dimensions			
	W1	W2	H1	H2
RTD-20	20	9	7	4.8
RTD-30	30	11	9	5.3
RTD-40	40	19	11	8.5
RTD-50	50	21	12	9.0
RTD-60	60	33	15	12.0
RTD-70	70	43	18	14.0
RTD-90	90	56	22	17.5
RTD-120	120	83	30	25.0

Round Type Cable Ducts

- Material : Rigid, PVC
- Length : 1M
- Colors : Gray, Ivory, White




Part No.	Dimensions	
	W	H
CT-2010	20 x 10	
CT-2713	27 x 13	
CT-1616	16 x 16	
CT-2516	25 x 16	
CT-4016	40 x 16	
CT-4020	40 x 20	
CT-3825	38 x 25	
CT-5032	50 x 32	
CT-5050	50 x 50	
CT-10050	100 x 50	
CT-7555	75 x 75	
CT-10075	100 x 75	
CT-100100	100 x 100	

Cable Trunking

- Material : Rigid, PVC
- Self-extinguishing
- Length : 2M
- Colors : White

Self Adhesive Tie Mount

UNIT: mm


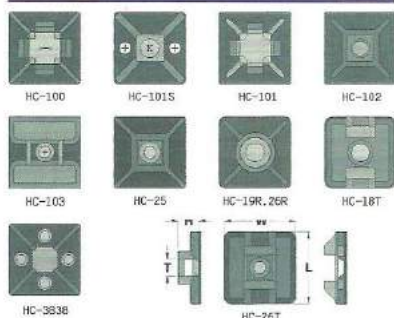


Item NO.	L	W	H	Mounting	T	Packing
HC-100-S4	12.5	12.5	3.2	-	3.2	100PCS
HC-101S-S2	19.5	19.5	3.9	3.2	4.6	
HC-101S	19.5	19.5	3.9	3.2	4.6	
HC-101	21.8	21.8	4	-	4.8	
HC-102	28.6	28.6	5.3	5.0	5.5	
HC-103	29.2	29.2	5.4	5.0	5.5	
HC-25	26.1	26.1	6	4.3	8.0	
HC-19R	18.9	18.9	4.6	4.8	4.2	
HC-26R	26.3	26.3	6	5.0	5.6	
HC-18T	19	19	5	4.4	4.1	
HC-26T	26.5	26.5	7.4	4.3	5.8	
HC-383B	38.5	38.5	7.6	5.0	10.2	

- Material: UL approved Nylon 66, 94V-2.
- Color : Natural, available in natural or other colors.
- SELF-ADHESIVE TIE MOUNTS is designed to support light weight wire bundles when properly applied on any clean, smooth, grease-free surface. For heavy support. Mounting hole is provided for screws.

Spiral Wrapping Band

UNIT: mm

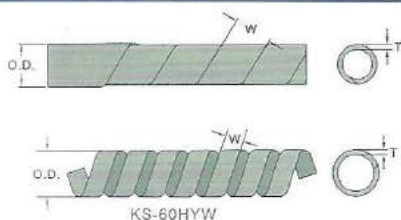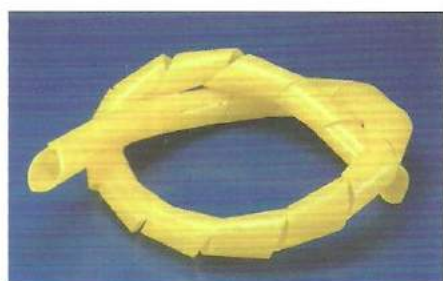


◆ PE

Item NO.	O.D.	T	W	Wrapping Range	Packing
KS-3	3.0	0.5	4.7	1.5~10	PE 10M / roll
KS-6	4.5	0.6	6.7	4~25	
KS-6L	6.0	0.6	7.4	4~25	
KS-6.5	6.5	0.55	7.9	5~25	
KS-8	8.0	0.75	12.0	6~30	
KS-10	10.0	0.8	12.3	7.5~30	
KS-12	12.0	0.85	15.0	9~32	
KS-15	15.0	1.0	15.5	12~35	
KS-19	19.0	1.2	19.2	15~50	
KS-24	24.0	1.3	21.5	20~100	
KS-30HYW	34.0	2.5	38.0	26~130	2M / PC
KS-60HYW	60.0	2.5	27.0		

Nylon Cable Gland




- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.

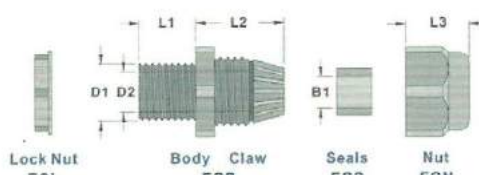

PG Thread
PG-7
PG-9
PG-11
PG-13.5
PG-16
PG-21
PG-29
PG-36
PG-42
PG-48

Self Adhesive Tie Mount

UNIT: mm


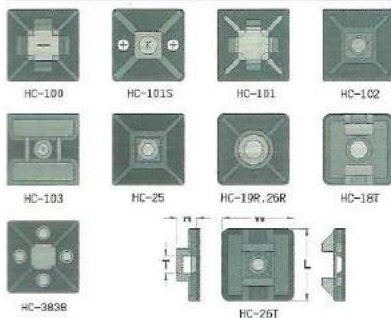


Item NO.	L	W	H	Mounting	T	Packing
HC-100-S4	12.5	12.5	3.2	-	3.2	100PCS
HC-101S-S2	19.5	19.5	3.9	3.2	4.6	
HC-101S	19.5	19.5	3.9	3.2	4.6	
HC-101	21.8	21.8	4	-	4.8	
HC-102	28.6	28.6	5.3	5.0	5.5	
HC-103	29.2	29.2	5.4	5.0	5.5	
HC-25	26.1	26.1	6	4.3	8.0	
HC-19R	18.9	18.9	4.6	4.8	4.2	
HC-26R	26.3	26.3	6	5.0	5.6	
HC-18T	19	19	5	4.4	4.1	
HC-26T	26.5	26.5	7.4	4.3	5.8	
HC-383B	38.5	38.5	7.6	5.0	10.2	

- Material: UL approved Nylon 66, 94V-2.
- Color : Natural, available in natural or other colors.
- SELF-ADHESIVE TIE MOUNTS is designed to support light weight wire bundles when properly applied on any clean, smooth, grease-free surface. For heavy support. Mounting hole is provided for screws.

Spiral Wrapping Band

UNIT: mm

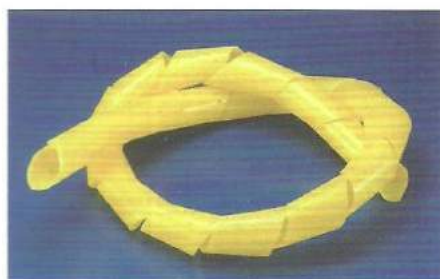


◆ PE

Item NO.	O.D.	T	W	Wrapping Range	Packing
KS-3	3.0	0.5	4.7	1.5~10	PE 10M / roll
KS-6	4.5	0.6	6.7	4~25	
KS-6L	6.0	0.6	7.4	4~25	
KS-6.5	6.5	0.55	7.9	5~25	
KS-8	8.0	0.75	12.0	6~30	
KS-10	10.0	0.8	12.3	7.5~30	
KS-12	12.0	0.85	15.0	9~32	
KS-15	15.0	1.0	15.5	12~35	
KS-19	19.0	1.2	19.2	15~50	
KS-24	24.0	1.3	21.5	20~100	
KS-30HYW	34.0	2.5	38.0	26~130	2M / PC
KS-60HYW	60.0	2.5	27.0		

Nylon Cable Gland




- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.

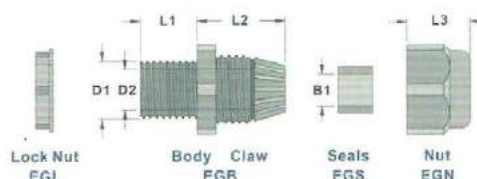

PG Thread
PG-7
PG-9
PG-11
PG-13.5
PG-16
PG-21
PG-29
PG-36
PG-42
PG-48

Insulated Ring Terminals


mm

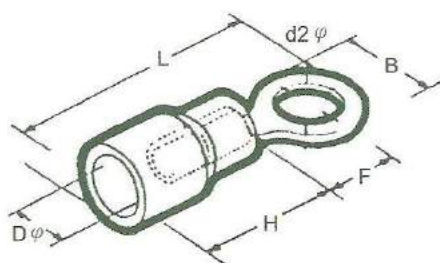

ITEM NO.	DIMENSIONS					WIRE RANGE		COLOR
	d2φ	B	L	H	Dφ	Twine mm ²	AWG	
VF1.25-3	3.7	5.5	17.3	10.4	4.0	0.25-1.65	22-16	RED
VF1.25-3A	3.2	5.5	17.3	10.4	4.0			
VF1.25-3M	3.7	6.6	20.3	10.4	4.0			
VF1.25-4	4.3	8.0	21.8	10.4	4.0			
VF1.25-4M	4.3	6.6	20.3	10.4	4.0			
VF1.25-5	5.3	8.0	21.8	10.4	4.0			
VF1.25-6	6.4	11.6	27.5	10.4	4.0			
VF1.25-8	8.4	11.6	27.5	10.4	4.0			
VF1.25-10	10.5	13.6	31.8	10.4	4.0	1.04-2.63	16-14	BLUE
VF2-3	3.7	8.5	22.3	10.4	4.6			
VF2-3A	3.2	8.5	22.3	10.4	4.6			
VF2-3M	3.7	6.6	19.8	10.4	4.6			
VF2-4	4.3	8.5	22.3	10.4	4.6			
VF2-4M	4.3	6.6	19.8	10.4	4.6			
VF2-5	5.3	9.5	22.3	10.4	4.6			
VF2-6	6.4	12.0	27.3	10.4	4.6			
VF2-8	8.4	12.0	27.3	10.4	4.6	2.63-4.60	12-10	YELLOW
VF2-10	10.5	13.6	30.8	10.4	4.6			
VF3.5-4	4.3	9.5	26.3	13.3	5.6			
VF3.5-5	5.3	9.5	26.3	13.3	5.6			
VF5.5-3	3.7	9.5	26.5	13.5	6.6	4.60-6.64	12-10	YELLOW
VF5.5-4	4.3	9.5	26.5	13.5	6.6			
VF5.5-5	5.3	9.5	26.5	13.5	6.6			
VF5.5-6	6.4	12.0	32.5	13.5	6.6			
VF5.5-8	8.4	15.0	34.8	13.5	6.6			
VF5.5-10	10.5	15.0	34.5	13.5	6.6			
VF8-3	3.7	10.0	36.0	17.5	8.3	6.64-10.52	8	RED
VF8-5	5.3	10.0	30.5	17.5	8.3			
VF8-6	6.4	11.0	32.0	17.5	8.3			
VF8-8	8.4	14.0	36.0	17.5	8.3			
VF8-10	10.5	18.0	39.5	17.5	8.3			

Insulated Spade Terminals



mm

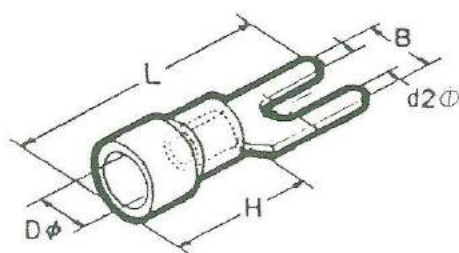

ITEM NO.	DIMENSIONS					WIRE RANGE		COLOR
	d2φ	B	L	H	Dφ	Twine mm ²	AWG	
VF1.25-3YS	3.7	5.7	21.8	10.4	4.0	0.25-1.65	22-16	RED
VF1.25-3YW	3.7	6.2	21.8	10.4	4.0			
VF1.25-4YS	4.3	6.4	21.8	10.4	4.0			
VF1.25-4YW	4.3	7.2	21.8	10.4	4.0			
VF1.25-5Y	5.3	8.0	21.8	10.4	4.0			
VF1.25-6Y	6.7	10.7	21.8	10.4	4.0	1.04-2.63	16-14	BLUE
VF2-3YS	3.7	5.7	21.8	10.4	4.6			
VF2-3YSA	3.2	5.7	21.8	10.4	4.6			
VF2-3YW	3.7	6.2	21.8	10.4	4.6			
VF2-4YS	4.3	6.4	21.8	10.4	4.6			
VF2-4YW	4.3	7.2	21.8	10.4	4.6			
VF2-5Y	5.3	8.0	21.8	10.4	4.6	2.63-4.60	12-10	YELLOW
VF2-6Y	6.7	10.7	21.8	14.4	4.6			
VF3.5-4Y	4.3	8.0	24.8	13.3	5.6			
VF3.5-5Y	5.3	8.0	24.8	13.3	5.6	4.60-6.64	12-10	YELLOW
VF5.5-3Y	3.7	8.2	26.5	13.6	6.6			
VF5.5-4Y	4.3	8.2	26.5	13.6	6.6			
VF5.5-5Y	5.3	9.0	26.5	13.6	6.6	6.64-10.52	8	RED
VF5.5-6Y	6.4	12.0	31.2	13.6	6.6			
VF8-6Y	6.7	12.0	32.5	17.5	8.3			

Insulated Male Connectors

mm

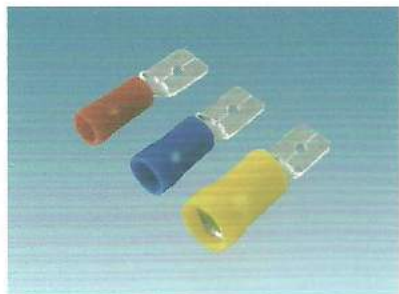


ITEM NO.	DIMENSIONS					
	W	L	T	φd	φD	B
RM110-5	2.8	18.5	0.5	2.1	3.8	10.0
RM110-8	2.8	18.5	0.8	1.8	3.8	10.0
RM187-5	4.5	19.0	0.5	2.1	3.8	10.0
RM187-8	4.5	19.0	0.8	1.8	3.8	10.0
RM250	6.3	21.1	0.8	1.8	3.8	10.0
BM110-5	2.8	18.5	0.5	2.7	4.2	10.0
BM110-8	2.8	18.5	0.8	2.4	4.2	10.0
BM187-5	4.5	19.0	0.5	2.7	4.2	10.0
BM187-8	4.5	19.0	0.8	2.4	4.2	10.0
BM250	6.3	21.1	0.8	2.3	4.2	10.0
YM110-5	2.8	22.0	0.5	3.8	5.4	13.0
YM110-8	2.8	22.0	0.8	3.5	5.4	13.0
YM187-5	4.5	22.0	0.5	3.5	5.4	13.0
YM187-8	4.5	22.0	0.8	3.5	5.4	13.0
YM250	6.3	22.0	0.8	3.5	5.4	13.0

Pin Terminals

mm



ITEM NO.	DIMENSIONS			WIRE RANGE			COLOR
	Fφ	L	H	Single mm	Twine mm ²	AWG	
PIN1.25	2.0	22.9	11	0.57~1.44	0.25~1.65	22~16	RED
PIN2	2.0	22.9	11	1.14~1.82	1.04~2.63	16~14	BLUE
PIN5.5	2.0	27.3	16	1.82~2.89	2.63~6.64	12~10	YELLOW




Blade Terminals

mm




ITEM NO.	DIMENSIONS					WIRE RANGE			COLOR
	B	t	L	G	H	Single mm	Twine mm ²	AWG	
PIN1.25F	3.1	0.8	17	12.5	4.5	0.57~1.44	0.25~1.65	22~16	RED
PIN2F	3.1	0.8	17	12.5	4.5	1.14~1.82	1.04~2.63	16~14	BLUE
PIN5.5F	3.3	1.0	21	14.5	6.5	1.82~2.89	2.63~6.64	12~10	YELLOW





Nylon Fully Insulated Male Connectors


mm



ITEM NO.	DIMENSIONS						WIRE RANGE		COLOR
	B	L	t	ød	øD	H	Twine mm ²	AWG	
RM250FLP	6.3	22.0	0.8	1.8	3.9	10.4	0.75~1.25	18~16	RED
BM250FLP	6.3	22.0	0.8	2.3	4.2	10.4	1.25~2.0	16~14	BLUE
YM250FLP	6.3	22.5	0.8	3.5	5.5	13.4	2.63~6.64	12~10	YELLOW

Fully Insulated Female Connectors


mm



ITEM NO.	DIMENSIONS							WIRE RANGE		COLOR
	B	W	L	ød	øD	G	H	Twine mm ²	AWG	
RF250FLP	6.8	9.6	23.7	1.8	3.9	6.4	10.4	0.75~1.25	18~16	RED
BF250FLP	6.8	9.6	23.7	2.3	4.2	6.4	10.4	1.25~2.0	16~14	BLUE
YF250FLP	6.8	9.6	24.1	3.5	5.5	6.4	13.4	2.63~6.64	12~10	YELLOW
RF250F	6.8	9.6	23.7	1.8	3.9	6.4	11	0.75~1.25	18~16	RED
BF250F	6.8	9.6	23.7	2.3	4.2	6.4	11	1.25~2.0	16~14	BLUE
YF250F	6.8	9.6	24.1	3.5	5.5	6.4	12	2.63~6.64	12~10	YELLOW


Insulated Bullet Connectors

mm



ITEM NO.	DIMENSIONS				WIRE RANGE		COLOR
	ød	øD	I	L	Twine mm ²	AWG	
F1.25A	3.96	3.9	11	22	0.57~1.25	18~16	RED
F2A(4)	3.96	4.2	11	22	1.25~2.0	16~14	BLUE
F2A(5)	4.96	4.2	11	22	1.25~2.0	16~14	BLUE
F5.5A(4)	3.96	5.5	13.7	25.1	2.63~6.64	12~10	YELLOW
F5.5A(5)	4.96	5.0	13.7	25.1	2.63~6.64	12~10	YELLOW


Insulated Socket Connectors



ITEM NO.	DIMENSIONS				WIRE RANGE		COLOR
	E	I	L	ØD	Twine mm ²	AWG	
F1.25B	14	10	24	3.9	0.57~1.25	18~16	RED
F2B(4)	14	11	25	4.2	1.25~2.0	16~14	BLUE
F2B(5)	14	11	25	4.2	1.25~2.0	16~14	BLUE
F5.5B(4)	13.5	12	25.5	5.5	2.63~6.64	12~10	YELLOW
F5.5B(5)	13.5	12	25.5	5.0	2.63~6.64	12~10	YELLOW

mm


Insulated Butt Connectors



ITEM NO.	DIMENSIONS				WIRE RANGE		
	Ød	ØD	L	I	Single mm	Twine mm ²	AWG
BF1.25	2	5.6	23	15.0	0.57~1.44	0.57~1.25	22-16
BF2	2.4	6.2	24	15.0	1.44~1.82	1.25~2.0	16-14
BF5.5	3.6	8.1	25.5	15.0	1.82~2.98	2.65~6.64	12-10

mm


Insulated Butt Connectors



ITEM NO.	DIMENSIONS				WIRE RANGE		
	Ød	ØD	L	I	Single mm	Twine mm ²	AWG
BF1.25LP	1.57	3.98	28.55	15.88	0.57~1.44	0.57~1.25	22-16
BF2LP	2.46	4.95	29.54	16.88	1.44~1.82	1.25~2.0	16-14
BF5.5LP	3.61	6.5	33.02	20.57	1.82~2.98	2.65~6.64	12-10

mm

Quicksplice Connectors



PART NO.	ITEM NO.	DIMENSIONS		WIRE RANGE		COLOR
		L	B	Twine mm ²	AWG	
LY033001	3MR	20	32	0.25~1.65	22~16	RED
LY033002	3MB	20	32	1.04~2.63	16~14	BLUE
LY033003	3MY	21	32	2.63~6.64	12~10	YELLOW


mm

Cord-End Terminals

DIN 46228/4 END SLEEVES WITH INSULATION POLYAMID 66

Temperature range: -40°C up to +105°C

Material: E-copper Tinned

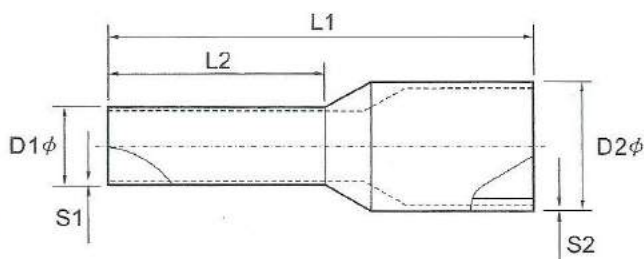

mm

ITEM NO.	(sq.mm)	DIMENSIONS						COLOR SYSTEM			PACKING
		D1φ	D2φ	L1	L2	S1	S2	T	W	DIN	
LT02506 LT02508	0.25	0.75	1.90	10 12	6 8	0.15	0.30	VIOLET	LIGHT BLUE		1000 1000
LT03406 LT03408	0.34	0.80	1.90	10 12	6 8	0.15	0.30	PINK	TURQUOISE		1000 1000
LT05006 LT05008 LT05010	0.50	1.00	2.60	12 14 16	6 8 10	0.15	0.30	WHITE	ORANGE	WHITE	500 500 500
LT07506 LT07508 LT07510 LT07512	0.75	1.20	2.80	12 14 16 18	6 8 10 12	0.15	0.30	BLUE	WHITE	GREY	500 500 500 500
LT10006 LT10008 LT10010 LT10012	1.00	1.40	3.00	12 14 16 18	6 8 10 12	0.15	0.30	RED	YELLOW	RED	500 500 500 500
LT15008 LT15010 LT15012 LT15018	1.50	1.70	3.50	14 16 18 24	8 10 12 18	0.15	0.30	BLACK	RED	BLACK	500 500 500 500
LT25008 LT25010 LT25012 LT25018	2.50	2.20	4.20	14 16 18 24	8 10 12 18	0.15	0.30	GREY	BLUE	BLUE	500 500 500 500
LT40010 LT40012 LT40018	4.00	2.80	4.80	17 20 26	10 12 18	0.20	0.35	ORANGE	GREY	GREY	500 500 500
LT60012 LT60018	6.00	3.50	6.30	20 26	12 18	0.20	0.35	GREEN	BLACK	YELLOW	500 500
LT100012 LT100018	10.00	4.50	7.60	22 28	12 18	0.20	0.40	BROWN	IVORY	RED	500 500
LT160012 LT160018	16.00	5.80	8.80	24 28	12 18	0.20	0.40	IVORY	GREEN	BLUE	500 500
LT250016 LT250022	25.00	7.30	11.20	28 35	16 22	0.20	0.40	BLACK	BROWN	YELLOW	500 500
LT350016 LT350018 LT350025	35.00	8.30	12.70	30 32 39	16 18 25	0.20	0.40	RED	BEIGE	RED	500 500 500
LT500020 LT500025	50.00	10.30	15.00	36 40	20 25	0.30	0.50	BLUE	OLIVE	BLUE	100 100
LT700021	70.00	13.50	16.00	37	21	0.40	0.60			YELLOW	100
LT950025	95.00	14.70	18.00	44	25	0.40	0.60			RED	100
LT120027	120.00	16.70	20.00	48	27	0.45	0.70			BLUE	100
LT150032	150.00	19.50	23.00	58	32	0.50	1.00			YELLOW	100

※Specifications for reference only, changing without prior notice.

※Tri-Rated system is also available.