

Specification Chart


Output	Number of phases	Number of poles	Frequency Hz	Voltage V 50/60/60Hz	Rated current A 50/60/60Hz	Rated revolution r/min 50/60/60Hz	Protection	Cooling method	Rating	Insulation	Brake		
											Type	Rated torque of motor torque	Insulation
3.7kW	Three-phase	4	50/60/60 (50/50/60/60)	200/200/220 (380/400/400/440)	15.4/14.4/13.6 (7.8/7.7/7.2/6.8)	1450/1745/1755 (1455/1450/1745/1755)	Totally enclosed (IP44)	Self managed (JC411)	Continuous	Class E (Class B)	Non-excitation	At least 150%	Class E

Note 1: The values in parentheses under "Rated current" and "Rated revolution" are for 400 V class.
 Note 2: The protective construction for the brake type is IP20.

Model number	Motor output kW	Actual reduction ratio	Number of reduction steps	Reducer frame number	Output shaft revolution r/min		Allowable output shaft torque				Allowable output shaft O.H.L.		Drawing number of outline dimensions
					50Hz	60Hz	N·m		N·m		N	{kgf}	
							{kgf·m}	{kgf·m}	50Hz	60Hz			
CSMR370	10	1/10	1	40	150	180	218	{ 22.3 }	183	{ 18.6 }	5890	{ 601 }	1
	15	1/15			100	120	317	{ 32.3 }	266	{ 27.1 }	5890	{ 601 }	
	20	1/20			75	90	411	{ 41.9 }	346	{ 35.3 }	7120	{ 726 }	
	25	1/25			60	72	503	{ 51.3 }	424	{ 43.2 }	7120	{ 726 }	
	30	1/30			50	60	579	{ 59.1 }	491	{ 50.0 }	7860	{ 801 }	2
	40	1/40			37.5	45	755	{ 77.0 }	640	{ 65.3 }	15900	{ 1620 }	
	50	1/50			30	36	857	{ 87.4 }	767	{ 78.3 }	16700	{ 1700 }	
	60	1/60			25	30	857	{ 87.4 }	795	{ 81.1 }	16700	{ 1700 }	
HCMR370	40	1/40	2	50	37.5	45	803	{ 81.9 }	675	{ 68.9 }	15920	{ 1624 }	3
	50	1/50			30	36	993	{ 101 }	835	{ 85.2 }	16680	{ 1702 }	
	60	1/60			25	30	1148	{ 117 }	967	{ 98.7 }	16680	{ 1702 }	
	75	1/75			20	24	1363	{ 139 }	1192	{ 122 }	16680	{ 1702 }	
	90	1/90			16.7	20	1833	{ 187 }	1539	{ 157 }	16680	{ 1702 }	
	100	1/100			15	18	2029	{ 207 }	1705	{ 174 }	16680	{ 1702 }	
	120	1/126			11.9	14.3	2421	{ 247 }	2029	{ 207 }	16680	{ 1702 }	
	150	1/157.5			9.5	11.4	*2607	{ 266 }	2519	{ 257 }	16680	{ 1702 }	
	180	1/180			8.3	10	*2607	{ 266 }	*2607	{ 266 }	16680	{ 1702 }	
	200	1/200			7.5	9	*2607	{ 266 }	*2607	{ 266 }	16680	{ 1702 }	
	240	1/252			5.95	7.14	*2607	{ 266 }	*2607	{ 266 }	16680	{ 1702 }	
	300	1/315			4.76	5.71	*2607	{ 266 }	*2607	{ 266 }	16680	{ 1702 }	

Note 1: The actual reduction ratio is shown as the reduction ratio.
 Note 2: The output shaft revolution rate is calculated by dividing the synchronous motor revolution rate by the reduction ratio. Calculate the actual output revolution rate from the motor's rated revolution rate.
 Note 3: The models marked with * are ones for which torque is limited.

Output Housing Dimensions

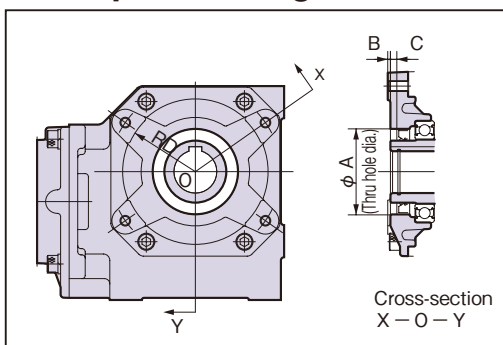

Frame number	Thru hole ϕA (H8)	B	C	RD
32	92	5.0	5	66
40	105	2.0	7	86
50	135	9.0	8	107