


Extruded Rail

T Rails


■ T Rails



Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-T-W-26M	10-100EX	White	26	-20 to 60
PR-T-G-26M	10-301EX	Green		

Note: 1. Standard products.
2. Dimensions are nominal due to extruded products.

■ T-403 Rails




Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-T403-W-26M	10-100EX	White	26	-20 to 60
PR-T403-G-26M	10-301EX	Green		

Note: 1. Standard products.
2. Dimensions are nominal due to extruded products.
3. Equivalent to PRT340-P-G (color: green).

Z Rails


■ Z Rails

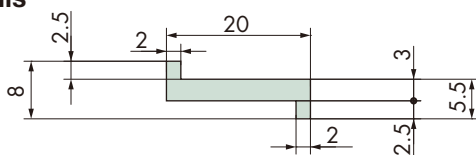

Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-Z-W-26M	10-100EX	White	26	-20 to 60
PR-Z-G-26M	10-301EX	Green		

Note: 1. Standard products.
2. Dimensions are nominal due to extruded products.
3. Equivalent to PRZ320-P-G (color: green).

■ Z22 Rails

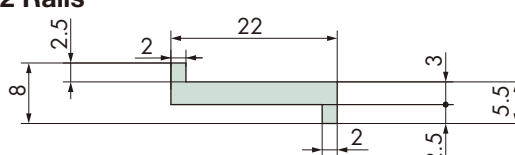


Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-Z22-W-26M	10-100EX	White	26	-20 to 60
PR-Z22-G-26M	10-301EX	Green		

Note: 1. Made-to-order products.
2. Dimensions are nominal due to extruded products.

L Rails


■ L Rails



Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-L-W-26M	10-100EX	White	26	-20 to 60
PR-L-G-26M	10-301EX	Green		

Note: 1. Standard products.
2. Dimensions are nominal due to extruded products.
3. Equivalent to PRL320-P-G (color: green).

■ L-5 Rails




Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-L5-W-20M	10-100EX	White	20	-20 to 60
PR-L5-G-20M	10-301EX	Green		

Note: 1. Standard products.
2. Dimensions are nominal due to extruded products.

L Rails

■ L-25 Rails




Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-L25-W-20M	10-100EX	White	20	-20 to 60
PR-L25-G-20M	10-301EX	Green		

Note: 1. Standard products.
2. Dimensions are nominal due to extruded products.

Snap-on Rails

■ Snap-on Rails




Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-SPR-W-30M	10-100EX	White	30	-20 to 60

Note: 1. Standard product.
2. Dimensions is a nominal due to extruded product.

Snap-on Rails


■ Snap-on L Rails



Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-SPRL-W-3M	10-100EX	White	3	-20 to 60

Note: 1. Standard product.
2. Dimensions is a nominal due to extruded product.

■ Snap-on 20 Rail



Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-SNA20-W-3M	10-100EX	White	3	-20 to 60

Note: 1. Standard product.
2. Dimensions is a nominal due to extruded product.