


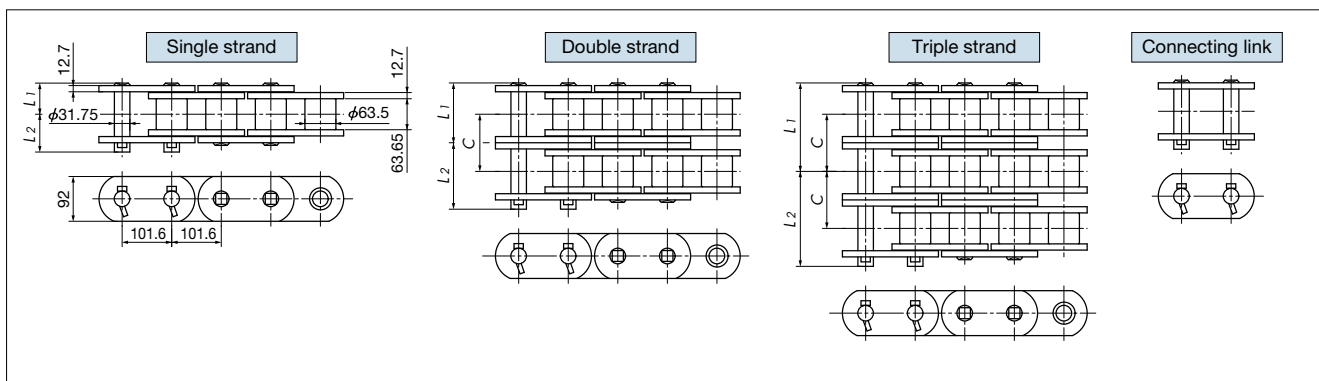

Specifications


Size & series	Number of strands	Dimensions L_1	Dimensions L_2	Offset pin length L	Transverse pitch C	Min. tensile strength kN{kgf}	Max. allowable load kN{kgf}	Approx. mass kg/m
RF320-T	1	63.8	77.6	—	117.1	1000{102000}	123{12500}	47.6
	2	122.4	136.3	—		2000{204000}	208{21250}	94.6
	3	181.0	194.9	—		3000{306000}	306{31250}	141.5
	4	239.7	253.5	—		4000{408000}	405{41250}	188.5

Note: 1. Offset links are not available.
2. Number of links per unit = 30

Model numbering example

RF320 -T -1 -RP + 20L -FTJR

Size Series Number of strands Pin type Number of links End link

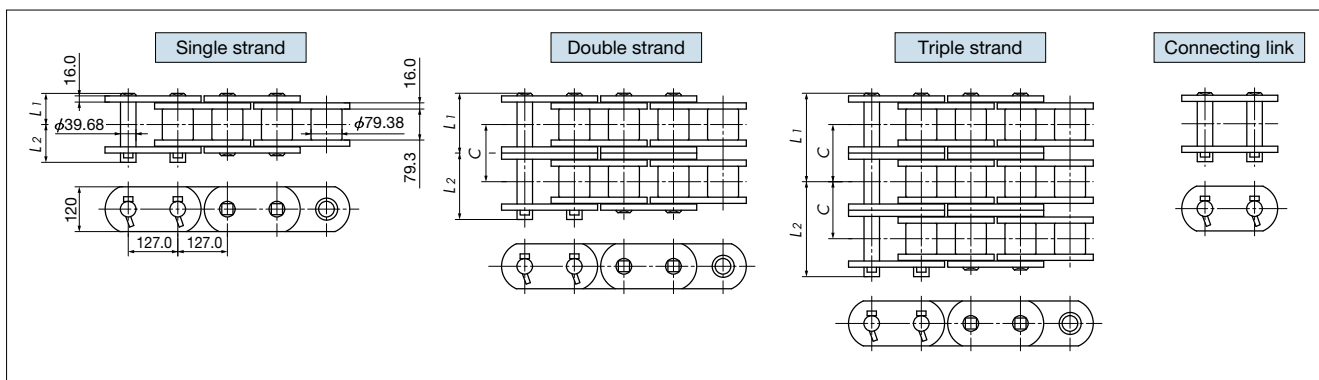

Specifications

Size & series	Number of strands	Dimensions L_1	Dimensions L_2	Offset pin length L	Transverse pitch C	Min. tensile strength kN{kgf}	Max. allowable load kN{kgf}	Approx. mass kg/m
RF400-T	1	79.65	92.65	—	146.8	1730{176000}	188{19200}	83.9
	2	153.05	165.95	—		3450{352000}	320{32640}	166.8
	3	226.45	239.25	—		5180{528000}	471{48000}	249.7
	4	299.8	312.5	—		6900{704000}	621{63360}	332.7

Note: 1. Offset links are not available.
2. Number of links per unit = 24

Model numbering example

RF400 -T -1 -RP + 14L -FTJR

Size Series Number of strands Pin type Number of links End link