


Threaded Tube End

Applications

When this part is inserted into a pipe and used in combination with a universal foot, it can be used as a leg for a conveyor frame.

Installation Example

Threaded Tube End Installation Example

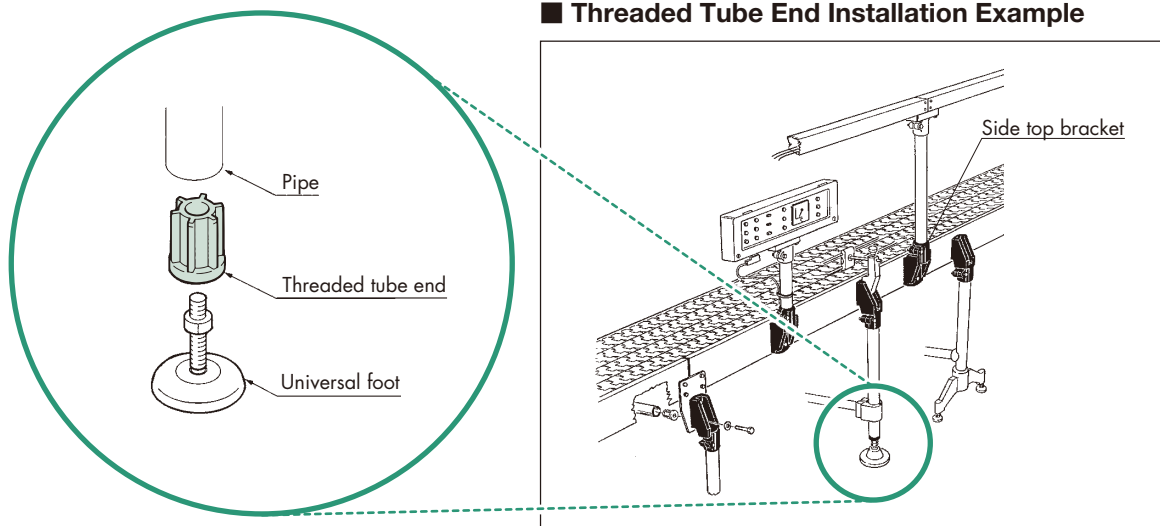


Specification Table

Threaded Tube End



(Attached)

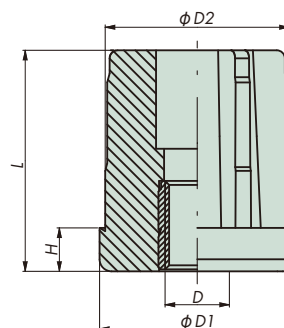

Tsubaki model no.	Diameter						Material	
	Applicable pipe outer diameter (nominal diameter)	D	φD1	φD2	H	L	Body	Bush
TP-C14767T-SRB	48.6 (1½)	M16	48	45.8	10	55	Polyamide (color: black)	Brass + nickel-plated
TP-C14791T-SRB	60.5 (2)		60	58	12	50		

Note: 1. Standard products.
2. Use a pipe with a thickness of 1.65 mm.
3. Not available.