


Model number

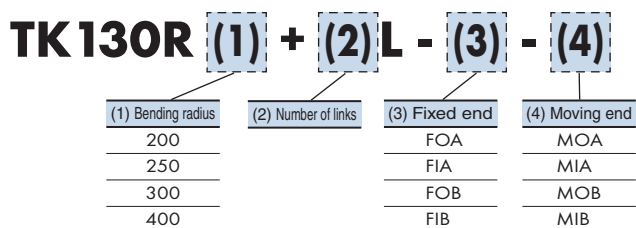

■ Stay


Example:

TK130-SP65-125-15 B-TK

■ Stay (thickness 15 mm)

Model number	Stay height A	Stay width B	For cable carrier model number
TK130-SP65-100-15T-TK	65	100	TK130R ■■
TK130-SP65-100-15B-TK		125	
TK130-SP65-125-15T-TK		150	
TK130-SP65-125-15B-TK		200	
TK130-SP65-150-15T-TK		250	
TK130-SP65-150-15B-TK		300	
TK130-SP65-200-15T-TK		350	
TK130-SP65-200-15B-TK		400	
TK130-SP65-250-15T-TK		450	
TK130-SP65-250-15B-TK		500	
TK130-SP65-300-15T-TK			
TK130-SP65-300-15B-TK			
TK130-SP65-350-15T-TK	75	100	
TK130-SP65-350-15B-TK		125	
TK130-SP65-400-15T-TK		150	
TK130-SP65-400-15B-TK		200	
TK130-SP65-450-15T-TK		250	
TK130-SP65-450-15B-TK		300	
TK130-SP65-500-15T-TK		350	
TK130-SP65-500-15B-TK		400	
TK130-SP75-100-15T-TK	90	100	
TK130-SP75-100-15B-TK		125	
TK130-SP75-125-15T-TK		150	
TK130-SP75-125-15B-TK		200	
TK130-SP75-150-15T-TK		250	
TK130-SP75-150-15B-TK		300	
TK130-SP75-200-15T-TK		350	
TK130-SP75-200-15B-TK		400	
TK130-SP90-100-15T-TK		100	
TK130-SP90-100-15B-TK		125	
TK130-SP90-125-15T-TK		150	
TK130-SP90-125-15B-TK		200	
TK130-SP90-150-15T-TK		250	
TK130-SP90-150-15B-TK		300	
TK130-SP90-200-15T-TK		350	
TK130-SP90-200-15B-TK		400	
TK130-SP90-250-15T-TK			
TK130-SP90-250-15B-TK			
TK130-SP90-300-15T-TK			
TK130-SP90-300-15B-TK			

■ Bore dimensions



Example: Bore diameter (from left) 20/16/16/20
Distance between stay bores (from left) 28/23/23/23/28

Bore diameter	D_1	D_2	D_3	D_4	
	20	16	16	20	
Distance between stay bores	b_1	b_2	b_3	b_4	b_5
	28	23	23	23	28

Note: "From left" means as viewed from the direction of the A-A arrow view in the dimensional drawing.

■ Steel bracket (including pin and circlip)

Model number	For cable carrier model number
TK130-MOA	TK130R ■■
TK130-MOB	
TK130-MIA	
TK130-MIB	
TK130-FOA	
TK130-FOB	
TK130-FIA	
TK130-FIB	

■ Stay (thickness 20 mm)

Model number	Stay height A	Stay width B	For cable carrier model number
TK130-SP65-100-20T-TK	65	100	TK130R ■■
TK130-SP65-100-20B-TK		125	
TK130-SP65-125-20T-TK		150	
TK130-SP65-125-20B-TK		200	
TK130-SP65-150-20T-TK		250	
TK130-SP65-150-20B-TK		300	
TK130-SP65-200-20T-TK		350	
TK130-SP65-200-20B-TK		400	
TK130-SP65-250-20T-TK		450	
TK130-SP65-250-20B-TK		500	
TK130-SP75-100-20T-TK	75	100	
TK130-SP75-100-20B-TK		125	
TK130-SP75-125-20T-TK		150	
TK130-SP75-125-20B-TK		200	
TK130-SP75-150-20T-TK		250	
TK130-SP75-150-20B-TK		300	
TK130-SP75-200-20T-TK		350	
TK130-SP75-200-20B-TK		400	
TK130-SP75-250-20T-TK		450	
TK130-SP75-250-20B-TK		500	
TK130-SP90-100-20T-TK	90	100	
TK130-SP90-100-20B-TK		125	
TK130-SP90-125-20T-TK		150	
TK130-SP90-125-20B-TK		200	
TK130-SP90-150-20T-TK		250	
TK130-SP90-150-20B-TK		300	
TK130-SP90-200-20T-TK		350	
TK130-SP90-200-20B-TK		400	
TK130-SP90-250-20T-TK		450	
TK130-SP90-250-20B-TK		500	
TK130-SP90-300-20T-TK			
TK130-SP90-300-20B-TK			

See page 20 for ordering information

See page 150 for product mass