


Features


1. Standard type of sideflexing plastic top chain. Easy washing due to its simple design.
2. Sprockets for TPS and TPU can be used with standardized parts.



TTUP826 (materials other than those below), TTUP1143, TTUP1905

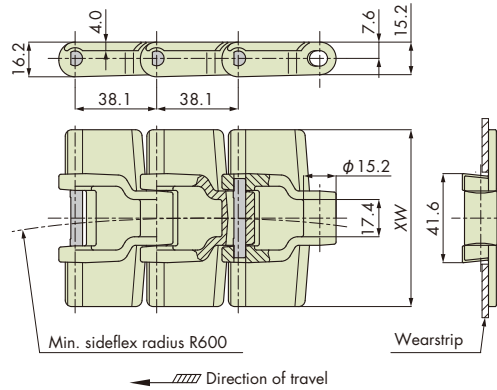

TTUP826-DIA, DIY, MPD, MPW, KV150, KV180

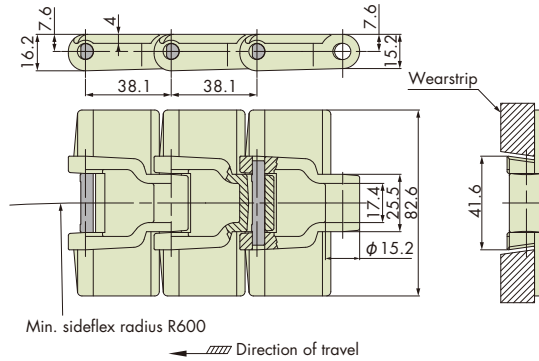

Chain pitch mm	Backflex radius mm	Number of links per unit
38.1	40	80

Chain Material Table

Material	Standard Chain								
	Standard			Low friction/Wear resistant			Advanced low friction/ Wear resistant	Low friction	
Material mark	—	B	BL	LFW	LFG	LFB	ALF	NLF	WR
Link color	Gray	Blue	Sky blue	White	Green	Brown	Light blue	Dark gray	Dark green
Max. allowable load kN {kgf}	1.08{110}								
Max. allowable speed m/min	With lube								
	No lube								
Operating temperature range °C	-20 to 80			-20 to (65)80			-20 to 80	-20 to (65)80	-20 to 80
Pin material	SUS304								
Pin type	D-pin								
TTUP826	●	△	△	○	●	●	●	△	●
TTUP1143	●	△	△	○	●	●	●	△	●
TTUP1905	●	△	△	○	●	●	○	△	○

Note: 1. "●": Standard products, "○": Made-to-order products, "△": Made-to-order products (RFQ).
 Not available for other chain materials that are not listed in the chain material table above.
 2. Operating temperature of (the value in parentheses) is for wet conditions.
 3. As of October 2008, the shape of TTUP826's link had changed. The new chain cannot be connected to the previous model.