
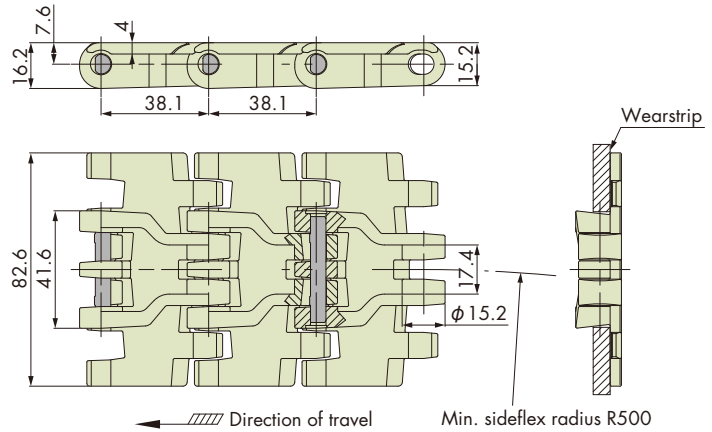
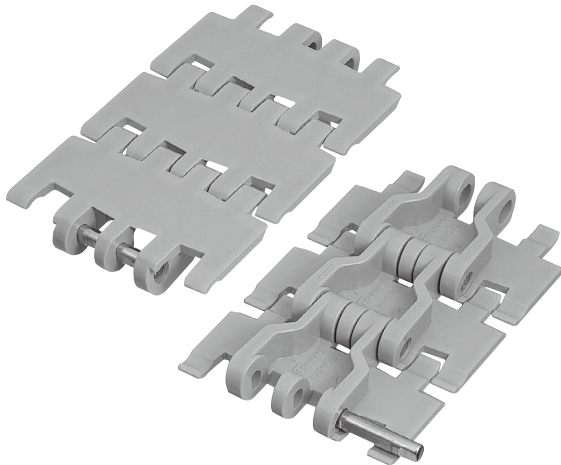


Plastic Top Chain TTUPH

Sideflexing Running

Features

1. Suitable for conveying unstable containers such as PET bottles and dessert cups due to its comb-toothed plates which minimize gaps between links.
2. Effective in preventing wobbling and toppling of containers due to improved flatness of the surface.
3. Can be replaced with TTUP due to having the same dimensions. Suitable for stable conveyance of containers.
4. Ensure smooth side transfer due to chamfered edges of both sides of the plate.

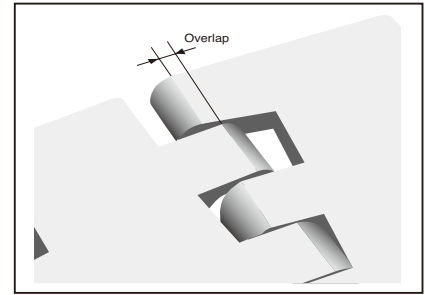

Chain pitch mm	Backflex radius mm	Number of links per unit
38.1	35	80

Chain Material Table

Standard Chain									
Material	Standard			Low friction/Wear resistant			Advanced low friction/Wear resistant	Low friction	
Material mark	—	B	BL	LFW	LFG	LFB	ALF	NLF	WR
Link color	Gray	Blue	Sky blue	White	Green	Brown	light blue	Dark gray	Dark green
Max. allowable load kN {kgf}	1.08{110}								
Max. allowable speed m/min	With lube	100							
	No lube	50							
Operating temperature range °C	-20 to 80			-20 to (65)80			-20 to 80	-20 to (65)80	-20 to 80
Pin material	SUS304								
Pin type	D-pin								
TTUPH826	○	△	△	○	●	●	●	△	△

Note: 1. "●": Standard products, "○": Made-to-order products, "△": Made-to-order products (RFQ).
 Not available for other chain materials that are not listed in the chain material table above.
 2. Operating temperature of (the value in parentheses) is for wet conditions.
 3. Plastic pin type is not available.