



Base Chain

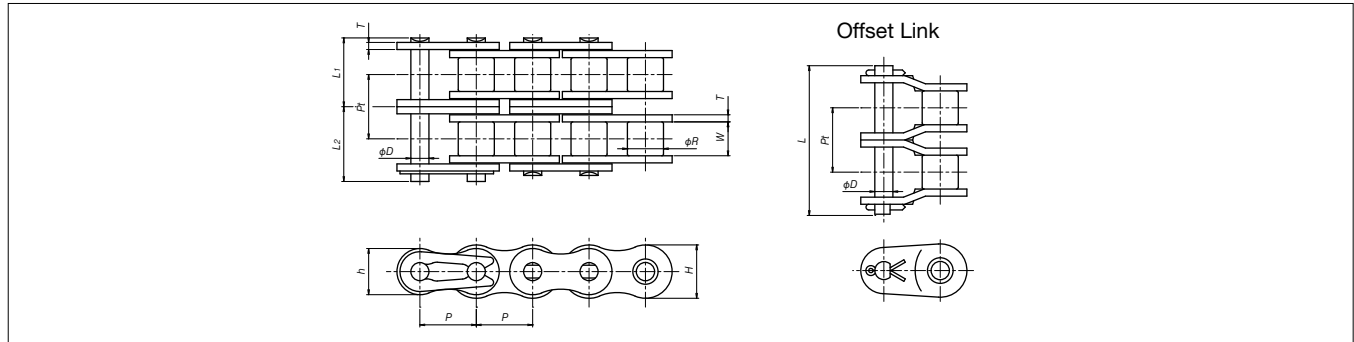

Attachments

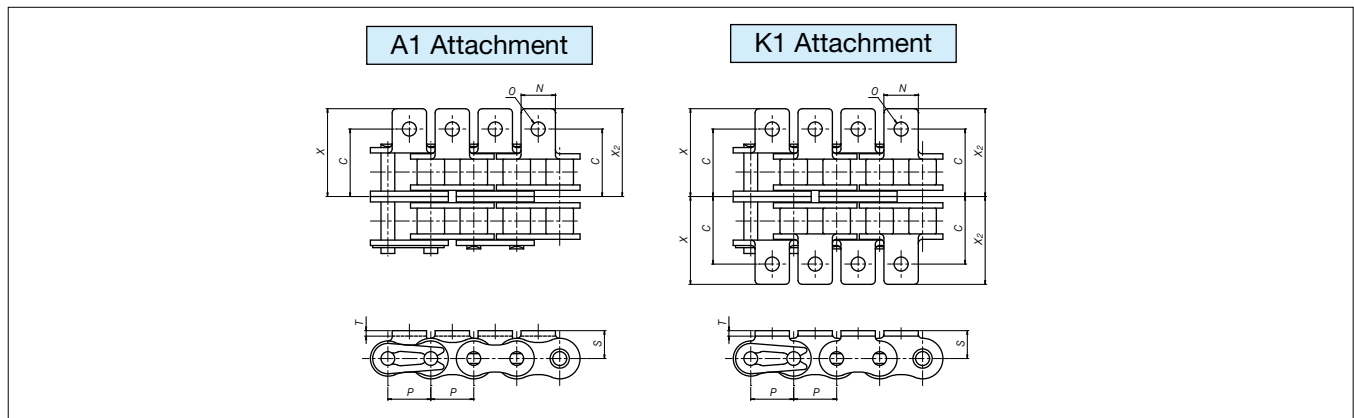

Base Chain Dimensions

Size	Pitch P	Roller Dia. R	Width Between Inner Link Plates W	Transverse Pitch Pt	Plate			Pin				Max. Allowable Load kN {kgf}	Approx. Mass kg/m	No. of Links per Unit
					Thickness T	Width H	Width h	Dia. D	L1	L2	L			
RS40-2	12.70	7.92	7.95	14.4	1.5	12.0	10.4	3.97	15.45	17.15	33.5	4.50 { 460 }	1.27	240
RS50-2	15.875	10.16	9.53	18.1	2.0	15.0	13.0	5.09	19.35	21.15	41.8	7.34 { 750 }	2.07	192
RS60-2	19.05	11.91	12.70	22.8	2.4	18.1	15.6	5.96	24.25	26.25	52.6	10.7 {1090 }	3.04	160
RS80-2	25.40	15.88	15.88	29.3	3.2	24.1	20.8	7.94	30.9	33.9	67.5	18.2 {1860 }	5.27	120
RS100-2	31.75	19.05	19.05	35.8	4.0	30.1	26.0	9.54	37.7	40.8	81.5	29.0 {2960 }	7.85	96

Attachment Dimensions

Size	C	N	O	S	T	X	X2	Additional Weight per Attachment kg	
								A	K
RS40-2	19.9	9.5	3.6	8.0	1.5	25.00	25.00	0.002	0.004
RS50-2	24.95	12.7	5.2	10.3	2.0	32.45	32.45	0.003	0.006
RS60-2	30.45	15.9	5.2	11.9	2.4	39.60	39.60	0.007	0.014
RS80-2	40.05	19.1	6.8	15.9	3.2	51.25	51.25	0.013	0.026
RS100-2	49.65	25.4	8.7	19.8	4.0	62.80	62.80	0.026	0.052

Note: 1. Also available in Lambda, SS, and NP specifications. Contact a Tsubaki representative for details.

2. RS sprockets can be used.

3. The above dimensions are nominal dimensions and may differ from actual dimensions.