

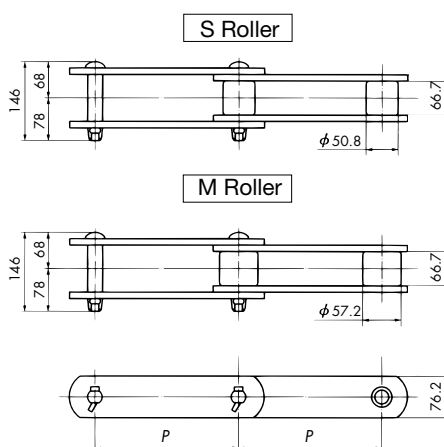
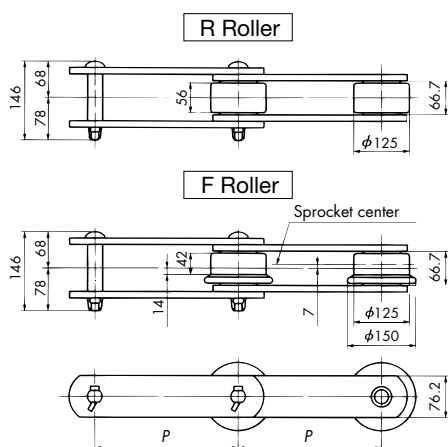
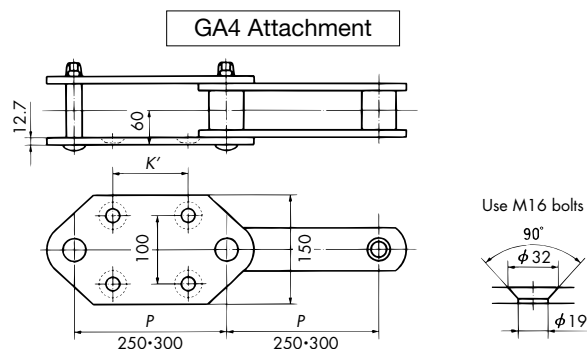
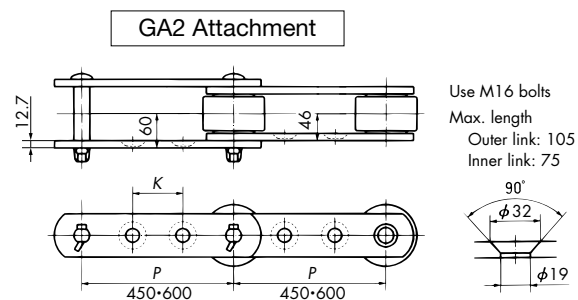


Metric Pitches (Dimensions) RF36250 • RF36300 • RF36450 • RF36600

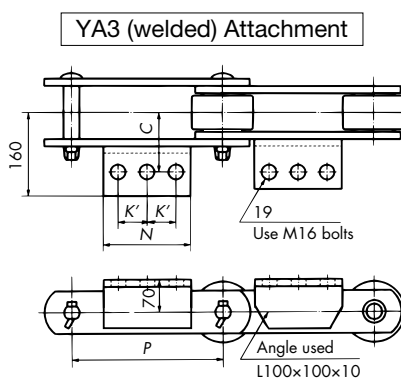

T-pin Nominal Diameter
 $\phi 8.5 (8.1) \times 45l$
 Note: Actual diameter given inside parentheses ().

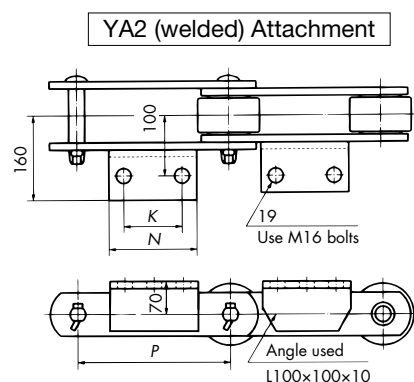

Size	Pitch <i>P</i>	Attachment						Attachment and Roller Combinations				Approximate Mass kg/m				YA Attachment Mass kg/each	GA4 Attachment Mass kg/each
		YA2		YA3		GA2	GA4										
		<i>N</i>	<i>K</i>	<i>K</i>	<i>K'</i>	<i>K</i>	<i>K'</i>	YA2 (welded)	YA3 (welded)	GA2	GA4	R Roller	F Roller	S Roller	M Roller		
RF36250	250	–	–	–	–	–	140	–	–	–	S/M	–	–	25	26	–	29 (30)
RF36300	300	160	100	–	–	–	180	R/F/S/M	–	–	S/M	40	42	23	24	2.4	27 (28)
RF36450	450	330	280	330	140	220	–	R/F/S/M	R/F/S/M	R/F/S/M	–	32	33	21	21	4.9	–
RF36600	600	410	360	410	180	300	–	R/F/S/M	R/F/S/M	R/F/S/M	–	28	29	19	20	6.1	–

Size	Maximum Allowable Load kN{kgf}							
	DT Series	DTA Series	AT Series	ATA Series	GS Series	GSA Series	SS Series	SSA Series
RF36250	68.0{6930}	68.0{6930}	97.4{9930}	117{11900}	-	-	-	-
RF36300								
RF36450								
RF36600								

- Note: 1. The mass of A attachments in the chart is the additional mass (kg) per attachment. For K attachments, multiply this number by two.
 2. The mass of the GA4 attachment in the chart is the mass (kg/m) when S Rollers are attached every other link. Values in parentheses () are for M Rollers.
 3. Contact a Tsubaki representative if using a guide on A or K attachment sides.
 4. The dimensions given above are nominal dimensions and may differ from actual dimensions.