Ixxat FRC-EP170 Plus CANonly

Item number: 1.13.0142.01302

The Ixxat FRC-EP170 Plus CANonly is a compact solution for automotive uses, focusing on CAN-based operations. It features six CAN channels, thereof two CAN FD and one CAN low-speed capable, including LIN and Digital in/out functionalities. This makes it ideal for logging, gateway, and residual bus simulation applications. Configuration is easily done with the Ixxat Advanced Configuration Tool (ACT).



Configurable automotive platform (6x CAN, thereof 2x CAN FD)

Features and benefits

Go-to solution for demanding network requirements

Enables easy integration of multiple bus systems into a single, compact device. This is essential for e-mobility projects and complex industrial applications.

Multi-connectivity with various interfaces

Additional interfaces included: 1 x LIN, 1 x Ethernet (10/100 Base-T), 4 x Digital in/out (A/D), USB 2.0 device and host and a SDHC slot. Further extension options are available.

Embedded platform with own processing power

All applications run on the device, a PC is only needed for configuration or stimulation/visualization of data, as the actual intelligence is outsourced to the embedded platform.

Extensive CAN connectivity

The FRC-EP170 Plus CANonly features six CAN channels, two of which are CAN FD and one CAN low-speed capable, catering extensive connectivity for a wide range of automotive applications.

Improved data management for efficient engineering

Streamlines data management and protocol handling, optimized for automotive testing, logging and gateway operations. Ensuring easy integration and reliable performance.

Quick and easy configuration through ACT support

The FRC-EP series is supported by the Ixxat ACT (Advanced Configuration Tool), a Windows-based tool to easily configure the device via drag and drop. Most use cases can be solved by using ACT Freeware.

Ixxat FRC-EP170 Plus CANonly



General

Net Width (mm)	113
Net Height (mm)	142
Net Depth (mm)	40
Net Weight (g)	800
Packed Width (mm)	29
Packed Height (mm)	7
Packed Depth (mm)	20
Packed Weight (g)	800
Operating Temperature °C Min	-40
Operating Temperature °C Max	80
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Relative Humidity	10 to 95 %, non-condensing
Current Consumption Type Value at Vcc Nom (mA)	320 mA (12 V DC)
Input Voltage (V)	6 V to 36 V DC
Power Connector	3-pole
Configuration	The Ixxat FRC-EP170 is a Linux platform that is able to work standalone without any connected PC. For the standalone function a configuration is needed, that can be created and downloaded to the device via the PC based Ixxat Automotive Configuration Tool (ACT) and an USB connection.
Content of Delivery	FRC-EP170 device, user manual, power supply cable (2 m, 3-pin Binder socket to 3 x 4 mm banana plugs), USB 2.0 cable (2 m, Type A to Mini Type B), runtime licences for Gateway and RBS, available as download: Advanced Configuration Tool (ACT)
Mounting	Panel mount

Ixxat FRC-EP170 Plus CANonly



General

Housing Materials	Aluminium
Packaging Material	Cardboard

Identification and Status

Product ID	1.13.0142.01302
Successor	1.13.0094.10107,1.13.0094.10507,1.13.0094.10407
Country of Origin	Germany
HS Code	8517620000
Dual Usage	No

Physical Features

Connectors / Input / Output	1 x RJ45 connector (Ethernet), 1 x USB type B port, 1 x USB type A port, 1 x SD card slot, 1 x 7-pin Binder female panel mount connector (remote/debug), 1 x 3-pin Binder male panel mount connector (power), 1 x D-Sub HD15 male connector, 1 x D-Sub HD15 female connector, 1 x RP-SMA female connector (WiFi/antenna)
Contains Battery	No

CAN Features

CAN Mode	CAN high-speed (ISO 11898-2), CAN low-speed (ISO 11898-3)
CAN Transceiver	TI SN65HVD251

CAN FD Features

CAN FD Transceiver	TCAN334GDCN

LIN Features

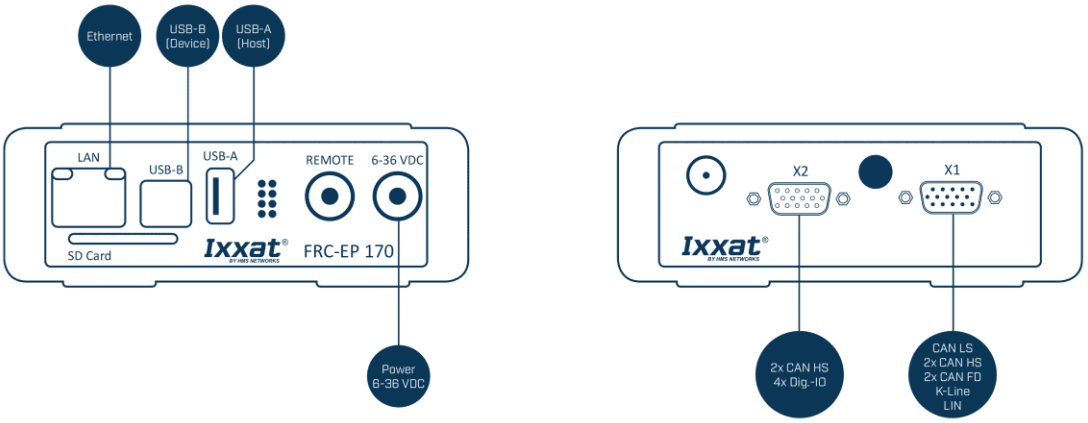
LIN Transceiver	TJA1020

Certifications and Standards

Protection Class IP	IP42
Product Certifications	CE
WEEE Category	IT and telecommunications equipment



Use Case


Ethernet
USB-B (Device)
USB-A (Host)
LAN
USB-B
USB-A
REMOTE
6-36 VDC
SD Card
Ixxat
FRC-EP 170
Power 6-36 VDC
X2
X1
Ixxat
2x CAN HS 4x Dig.-IO
CAN LS 2x CAN HS 2x CAN FD K-Line LIN