

RANGER® COUNT 1000 Counting Scales



Affordable Counting Scales for Basic Industrial Counting Operations

Ranger Count 1000 Counting Scales are designed to provide accurate counting results for basic operation in annual inventories, parts rooms, rental and other counting applications. With an internal counting resolution of 1:300,000, Ranger Count 1000 offers accuracy, durability and portability in one practical and surprisingly affordable design.

Standard Features

- Dedicated counting keypad, with numeric, Tare and Sample keys, makes counting operations simple and straightforward.
- APW memory provides storage for up to ten commonly used part weights, speeding up counting operations and minimizing redundant work.
- Ensure counting accuracy with auto-optimization software that recalculates the Average Piece Weight with each batch of parts.

RANGER®COUNT 1000 Counting Scales

Model	RC11P3	RC11P6	RC11P15	RC11P30
Default Capacity × Readability	3000 g × 0.2 g 3 kg x 0,0002 kg	6000 g × 0.5 g 6 kg x 0,0005 kg	15000 g × 1 g 15 kg x 0,001 kg	30000 g × 2 g 30 kg x 0,002 kg
Displayed Resolution	1:15,000	1:15,000	1:15,000	1:15,000
Minimim Recommended Sample Weight	2 g	5 g	10 g	20 g
Minimim Recommended APW	0.02 g	0.05 g	0.1 g	0.2 g
Internal Counting Resolution	1:300000			
Construction	F	lastic pan with Stainless ste	el inset, ABS plastic housin	g
Weighing Units		g or lb (mer	iu selected)	
Application Modes		Weighing, Counti	ng, Accumulation	
Display	3-Wi	ndow, backlit LCD 0.75 in /	19 mm High, 6-digit, 7-segi	ment
Memory		10 location	ns for APW	
Keypad		7 function, 11 nume	eric membrane keys	
Zero Range		4 % of full sc	ale capacity	
Tare Range		Full capacity b	y subtraction	
Stabilization Time		≤ 2 se	conds	
Safe Overload Capacity		150 % of	capacity	
Power		AC Adapter ۱۵\ Internal rechargeable s		
Battery Life		80 hours continuous use w	vith 12 hour recharge time	
Calibration	External with kg/g mass, factory calibration recovery			
Operating Temperature Range	0 °C to 40 °C			
Pan Size (W × L)	294 × 226 mm			
Scale Dimensions (W \times L \times H)		325 × 330.5	× 114 mm	
Shipping Dimensions ($W \times L \times H$)		440 × 360	× 160 mm	
Net Weight		4.2	kg	
Shipping Weight		5.3	kg	


Approvals

• Electrical/Emissions: Meets requirements of approval agencies: UL (adapter), FCC, CE Safety EN61558, EMC EN61326

Accessory

SST Pan, R11, RC11, A31

Outline Dimensions

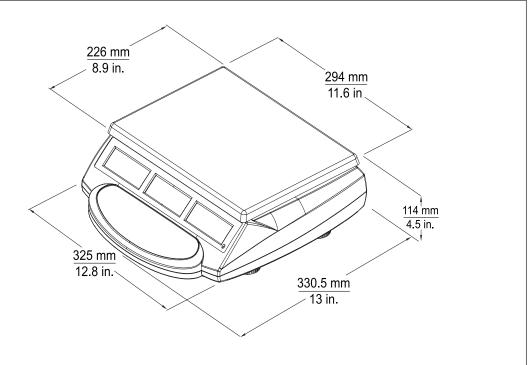

e-mail: ssc@ohaus.com Tel: 0041 22 567 53 19 e-mail: tsc@ohaus.com Tel: 0041 22 567 53 20 www.ohaus.com

80774768_C 20191113 © Copyright OHAUS Corporation

The management system governing the manufacture of this product is ISO 9001:2015 certified.

OHAUS Europe GmbH

Heuwinkelstrasse 3, 8606 Nänikon, Switzerland

