


eArc

SMF200J-6X10DB-e

200 Watt

60 Half Cell Monocrystalline Module

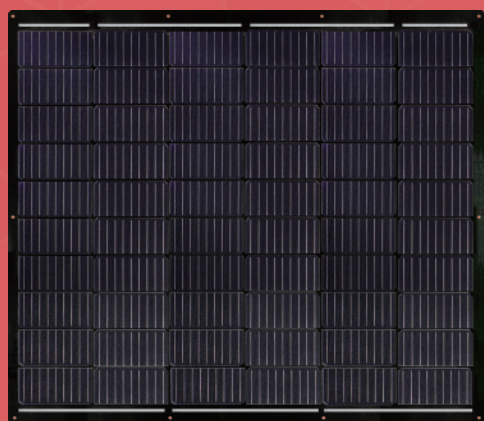

Ultra-light: Glass free module weighs 2.7 kg, 70% lighter than conventional glass modules.



Aesthetic: Seamless integration with underlying installation surface.



Durable: eArc is the first glassless module to pass the same durability tests as conventional glass modules, including IEC 61215:2016, IEC61730:2016 and UL61730 (USA). eArc has also passed PID, salt mist and ammonia corrosion tests.

POWER OUTPUT RANGE 200 W

POWER TOLERANCE 0-5 W

LINEAR PERFORMANCE WARRANTY

CAUTION: Read installation manual before using the product.

©2024 SunMan (zhenjiang) Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.


5 Year Product Warranty




www.sunman-energy.com




ULTRA-LIGHT & FLEXIBLE SOLAR PANEL

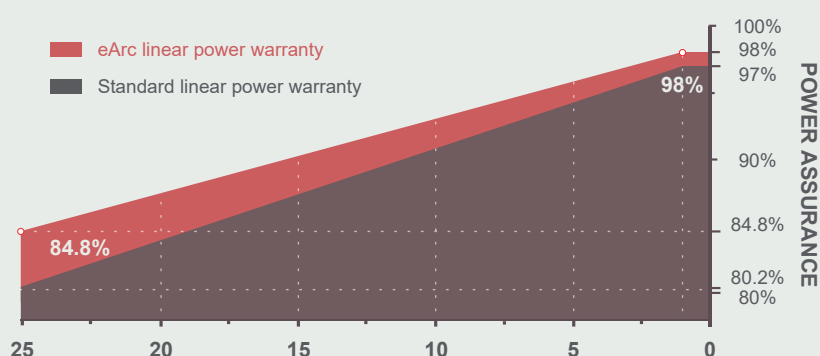

DIMENSIONS

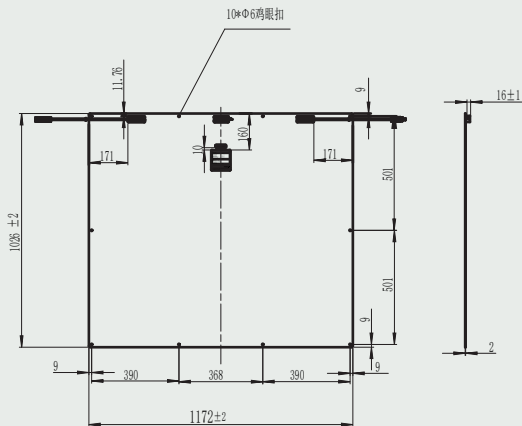


I-V CURVE (200)

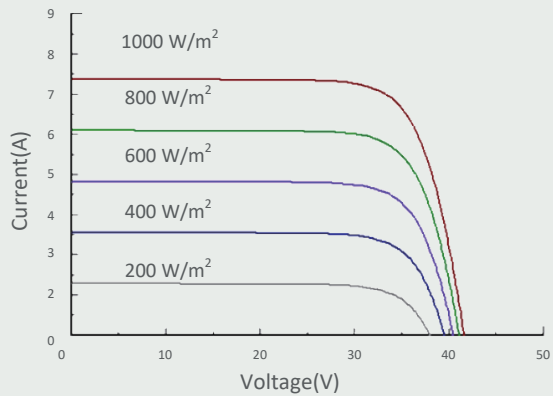

TEMPERATURE CHARACTERISTICS

Nominal Module Operating Temperature(NMOT)	41±2 °C
Temperature Coefficient of P _{max}	-0.34 %/°C
Temperature Coefficient of V _{oc}	-0.26 %/°C
Temperature Coefficient of I _{sc}	0.033 %/°C



SMFDB IEC EN 2024A 5 ZH

ELECTRICAL CHARACTERISTICS

MECHANICAL CHARACTERISTICS

PACKAGING CONFIGURATION