




DriPak GXM


Product Overview

- Innovative design - double tapered pockets for optimum airflow
- Very low resistance and energy use
- Improved dust distribution for increased DHC
- Lightweight

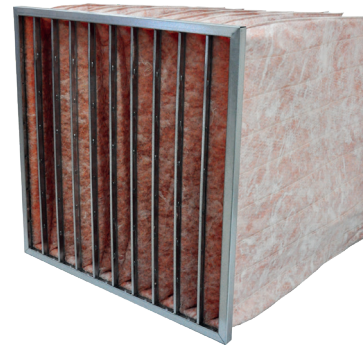

Specification

EN779	M6 - F9
ASHRAE 52.2	MERV 11 - 15
ISO 16890	ePM1 2.5 50%, ePM1 65%, 85%
Filter Depth (mm)	525, 635
Media Type	Fibreglass
Frame Material	Galvanised Steel
Special Size Available	Yes
Anitmicrobial Available	Optional
Single Header	Yes
Recommended Final Resistance	450 Pa
Max Operating Temperature	66°C

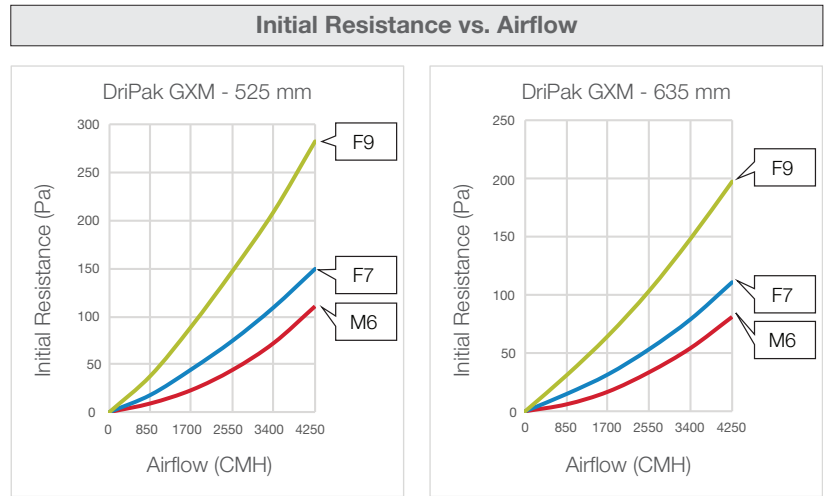

Product Information

Part Number	Nominal Size Inches (W x H x D)	Actual Size mm (W x H x D)	Number of Pocket	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
M6 / MERV 11 / ePM 2.5 50%					
M266-124-200	12 x 24 x 20	289 x 594 x 525	4	1,700	72
M266-136-200	20 x 24 x 20	492 x 594 x 525	6	2,800	
M266-118-200	24 x 24 x 20	594 x 594 x 525	8	3,400	
M266-125-250	12 x 24 x 25	289 x 594 x 635	5	1,700	55
M266-138-250	20 x 24 x 25	492 x 594 x 635	8	2,800	
M266-110-250	24 x 24 x 25	594 x 594 x 635	10	3,400	
F7 / MERV 13 / ePM1 65%					
M267-124-200	12 x 24 x 20	289 x 594 x 525	4	1,700	110
M267-136-200	20 x 24 x 20	492 x 594 x 525	6	2,800	
M267-118-200	24 x 24 x 20	594 x 594 x 525	8	3,400	
M267-125-250	12 x 24 x 25	289 x 594 x 635	5	1,700	80
M267-138-250	20 x 24 x 25	492 x 594 x 635	8	2,800	
M267-110-250	24 x 24 x 25	594 x 594 x 635	10	3,400	
F9 / MERV 15 / ePM1 85%					
M269-124-200	12 x 24 x 20	289 x 594 x 525	4	1,700	210
M269-136-200	20 x 24 x 20	492 x 594 x 525	6	2,800	
M269-118-200	24 x 24 x 20	594 x 594 x 525	8	3,400	
M269-125-250	12 x 24 x 25	289 x 594 x 635	5	1,700	149
M269-138-250	20 x 24 x 25	492 x 594 x 635	8	2,800	
M269-110-250	24 x 24 x 25	594 x 594 x 635	10	3,400	