# Neoprene Rubber Sheet (CR Rubber Sheet)




Neoprene rubber sheet is a polymer that provides moderate oil&gasline resistance, very good resistance to ozone&sunlight, excellent adhesion to fabric&metal, good resistance to abrasion&flex cracking and very good resistance to alkalis&acids.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m, 20m

| | Hardness Shore A | Density g/cm3 | Tensile Strength Mpa | Elongation % | Temperature Range °C |
|---|---|---|---|---|---|
| Neoprene rubber sheet | 80 +/-5 | 1.5 | 4 | 200% | -20 ~ 80 |
| Neoprene rubber sheet | 65 +/-5 | 1.5 | 3 | 250% | -20 ~ 80 |
| Neoprene rubber sheet | 65 +/-5 | 1.5 | 4 | 250% | -20 ~ 80 |
| Neoprene rubber sheet | 65 +/-5 | 1.4 | 5 | 250% | -20 ~ 90 |
| Neoprene rubber sheet | 65 +/-5 | 1.4 | 6 | 300% | -20 ~ 100 |
| Neoprene rubber sheet | 65 +/-5 | 1.4 | 8 | 300% | -30 ~ 100 |
| Neoprene rubber sheet | 60 +/-5 | 1.35 | 10 | 300% | -30 ~ 100 |

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

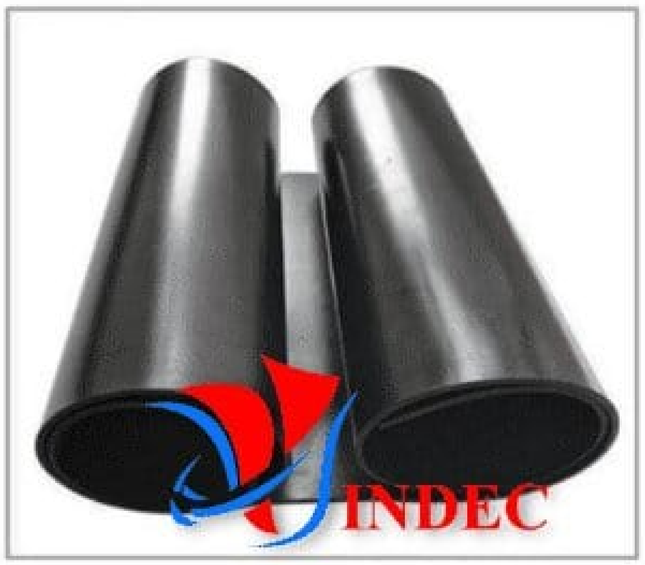

Website: https://vindec.vn
Email: info@vindec.vn