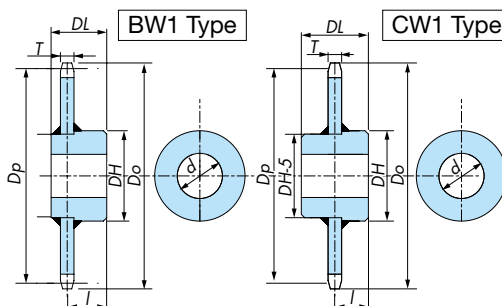
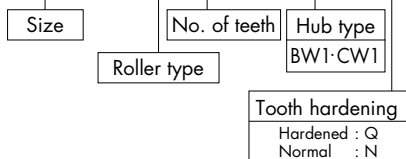




for RF26

Sprockets (BW1/CW1)

RF26200 R 6T-BW1 N


S1 Tooth Profile
(Teeth are rounded)S2 Tooth Profile
(Teeth are flat)

	Size and Roller Type	No. of Teeth N	Basic Sprocket Dimensions and Shape					Standard Series				BW1 Type		CW1 Type	
			Pitch Circle Dia. D_p	Outer Dia. D_o	Tooth Width T	Tooth Profile	Bore Dia. d		Hub Dia. D_H	Total Length DL	Approx. Weight kg	Hub No.	Center Distance I	Hub No.	Center Distance I
							Pilot Bore	Max.							
R Roller	RF26250R	6	500.0	536	45	S2	75	145	207	180	98.7	TB5	144.0	TC5	90.0
		8	653.3	703		S2	80	160	227	200	159.7	TB6	164.0	TC6	100.0
		10	809.0	864		S1	85	175	247	240	244.1	TB9	204.0	TC9	120.0
		12	965.9	1026		S1	85	175	247	240	321.4	TB9	204.0	TC9	120.0
	RF26300R	6	600.0	631	45	S2	80	160	227	220	146.7	TB7	184.0	TC7	110.0
		8	783.9	829		S2	85	175	247	240	233.0	TB9	204.0	TC9	120.0
		10	970.8	1025		S1	85	175	247	240	324.0	TB9	204.0	TC9	120.0
		12	1159.1	1219		S1	95	190	267	270	456.4	TB11	234.0	TC11	135.0
F Roller	RF26250F	6	500.0	536	30	S2	75	145	207	180	79.6	TB5	150.0	TC5	90.0
		8	653.3	703		S2	80	160	227	200	125.0	TB6	170.0	TC6	100.0
		10	809.0	864		S1	85	175	247	240	189.3	TB9	210.0	TC9	120.0
		12	965.9	1026		S1	85	175	247	240	240.7	TB9	210.0	TC9	120.0
	RF26300F	6	600.0	631	30	S2	80	160	227	220	118.2	TB7	190.0	TC7	110.0
		8	783.9	829		S2	85	175	247	240	181.9	TB9	210.0	TC9	120.0
		10	970.8	1025		S1	85	175	247	240	242.5	TB9	210.0	TC9	120.0
		12	1159.1	1219		S1	95	190	267	270	338.8	TB11	240.0	TC11	135.0
S Roller	RF26200S	6	400.0	427	45	S1	75	145	207	180	73.8	TB5	144.0	TC5	90.0
		8	522.6	547		S1	75	145	207	180	105.1	TB5	144.0	TC5	90.0
		10	647.2	674		S1	80	160	227	200	157.5	TB6	164.0	TC6	100.0
		12	772.7	800		S1	85	175	247	240	228.2	TB9	204.0	TC9	120.0
	RF26250S	6	500.0	527	45	S1	75	145	207	180	98.7	TB5	144.0	TC5	90.0
		8	653.3	680		S1	80	160	227	200	159.7	TB6	164.0	TC6	100.0
		10	809.0	836		S1	85	175	247	240	244.1	TB9	204.0	TC9	120.0
		12	965.9	993		S1	85	175	247	240	321.4	TB9	204.0	TC9	120.0
	RF26300S	6	600.0	648	45	S2	80	160	227	220	146.7	TB7	184.0	TC7	110.0
		8	783.9	811		S1	85	175	247	240	233.0	TB9	204.0	TC9	120.0
		10	970.8	998		S1	85	175	247	240	324.0	TB9	204.0	TC9	120.0
		12	1159.1	1186		S1	95	190	267	270	456.4	TB11	234.0	TC11	135.0

Note: The above dimensions are nominal dimensions and may differ from actual dimensions.

■ Hanging Hole Dimensions

Size	No. of Teeth	Hanging Hole Dim. A	No. of Hanging Holes
RF26200	10	195	1
	12	235	4
RF26250	8	195	1
	10	250	4
	12	305	4
RF26300	6	175	1
	8	240	4
	10	305	4
	12	370	4

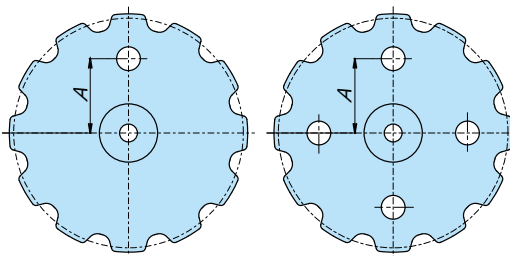

Note: Hanging holes are not available on sprockets with numbers of teeth or chain numbers not listed.