

# Technical Data Sheet



## FEROLITE NAM 30 NON ASBESTOS GASKET JOINTING SHEET



### Applications:

Suitable for oil resistant gasket material for medium to higher loading, good resistance to water and gases, oils & fuels. A standard sealing material used in compressors, pipelines, transmission, gas meters and internal combustion engines.

### Approvals:

TA-Luft as per DIN 28090-1 or EN 13555

The Material suitable as a high grade sealing products

### General data:

**Material Composition (Type of fibres)** Aramid Fiber, Mineral Fibre.

**Binders** NBR

### OPERATING CONDITION

**Max. Peak Temp** 400°C


**Max. Continuous Temp** 250°C

**Max. Continuous Temp. with steam** 220°C

**Max. Operating Pressure** 100 Kg/cm<sup>2</sup>

### Physical Properties:

The following Information applies to material thickness 2.0 mm.

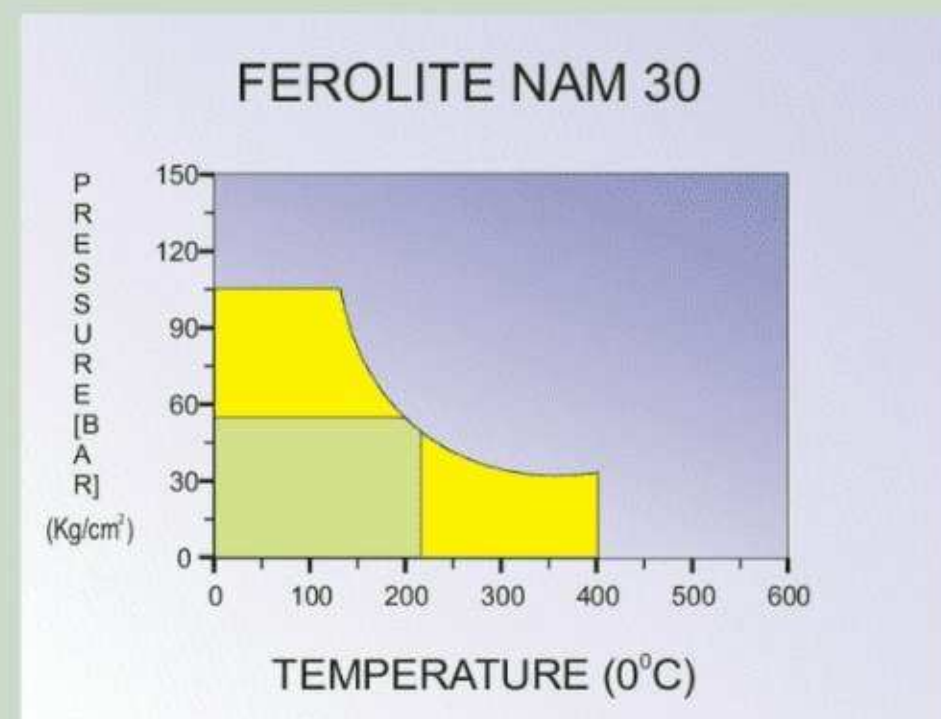

S.NO.	PROERTIES	TEST METHOD	UNIT	SPECIFIED VALUE
1.	DENSITY		gm/cm <sup>3</sup>	1.70 - 2.00
2.	TENSILE STRENGTH			
	(a) ACC to ASTM F152(ACROSS GRAIN)		N/mm <sup>2</sup>	> 10
	(b) ACC to DIN52910 (ACROSS GRAIN)		N/mm <sup>2</sup>	> 7
3.	COMPRESSIBILITY	ASTM F36A	%	5 – 15
4.	RECOVERY	ASTM F36A	%	> 50
5.	FLUID ABSORPTION	ASTM F 146		
	(a) IN ASTM OIL NO. 3			
	INCREASE IN MASS		%	< 10
	INCREASE IN THICKNESS		%	< 10
	(b) IN FUEL B	ASTM F 146		
	INCREASE IN MASS		%	< 10
	INCREASE IN THICKNESS		%	< 10
	(c) IN WATER/ANTIFREEZE	ASTM F 146		
	INCREASE IN MASS		%	< 10
	INCREASE IN THICKNESS		%	< 7
6.	IGNITION LOSS	DIN 52911	%	< 30
7.	SEALABILITY AGAINST Nitrogen	DIN 3535	cm <sup>3</sup> /min.	< 1.0
8.	STRESS RESISTANCE			
	16h 300°C	DIN 52913	N/mm <sup>2</sup>	~18
	16h 175°C	DIN 52913	N/mm <sup>2</sup>	~ -